Rieber

GN & THERMOPORT BROCHURE 2022

thermoplates eco

energy-saving | increased conductivity stackable & dimensionally stable | robust & durable environmentally friendly







Achieve minimum 10 % energy savings with our SWISS | PLY multilayer material.



Finalist – German Sustainability Award 2021

Our GN-returnable-system digitally organized – TRACK YOUR PLASTIC SAVINGS





Achieve minimum 10 % energy savings with our SWISS | PLY multilayer material.

Your entire process - a thermoplates®eco







More info ...

thermoplateseco

For you and for our environment, we every kitchen. The greatest innovation is to make the existing better – that's the Rieber GN-standard!

Our new thermoplates®eco, not just a GN-container but your energy saving GN cooking pot.

With our new thermoplates®eco, you save a minimum of 10 % energy and up to 21 % in time in every process using GN pans, allowing you to prepare, chill, cook and regene-GN pans, allowing you to prepare, chill, cook and regenerate faster and more efficiently while reducing CO₂.

make climate change a top priority in Evenbetter-tosaveenergyandtimeyoudon'thavetochange your kitchen processes or equipment - just change your usual GN-container for a new thermoplates®eco GN-pan, made of energy saving SWISS|PLY multilayer material.

COMPARISON: 1. cooling down to 3 °C * & 2. regeneration to 72 °C \(\delta\) (mashed potatoes in GN 1/1 100 mm)

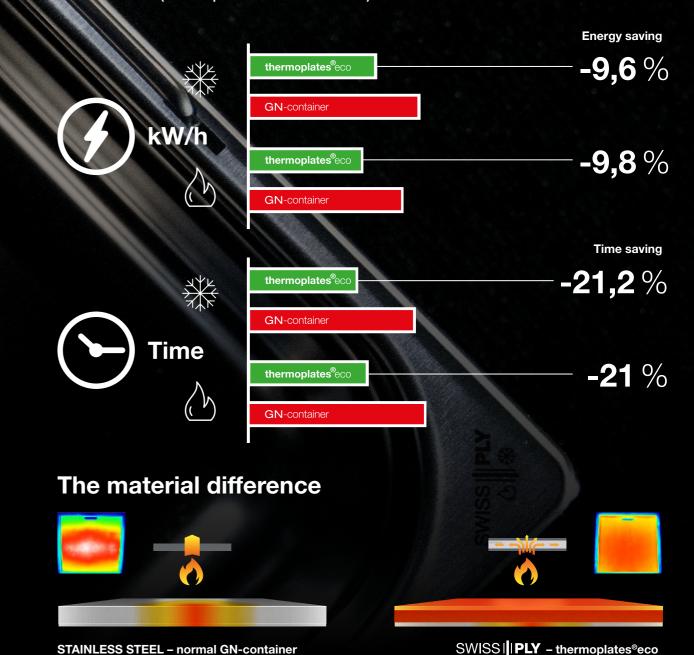


TABLE OF CONTENTS

RIEBER FOOD TRANSPORT	6
eatTAINABLE	8
GN-CONTAINER	12
GN-COVER	30
THERMOPLATES® GN-COOKING-POT	42
GN-COVER THERMOPLATES®	62
THERMOPORT® PREMIUM STAINLESS STEEL	68
THERMOPORT® LIGHT PLASTIC	84
ACCESSORIES & THERMIS	98
ASSEMBLY VARIANTS	106
CHECK CLOUD	128
RIEBER CONNECT	130
DIGITAL SERVICE	132
YOUR CONTACT TO US	134

RIEBER FOOD-TRANSPORT IN REUSABLE GN & THERMOPORT®

Your transport standard for best food quality & absolute safety, both in in-house and out-of-house catering. Whether daycare centers, schools, homes, nursing homes, retirement homes or residential homes, hospitals, company catering, hotels, restaurants, restaurants, military & disaster control, army up to correctional

port are as diverse as the customer groups in mass cate- food transport, your HACCP documentation, to the susring. We offer you the right thermoport® and GN-products tainable and forward-looking reusable organization. We for each of your requirements - and thanks to the standard offer you solutions with which you can make longterm dimensions, you can flexibly combine and vary them as and sustainable savings and delight your customers with

healthy and fresh food.



Digital tracking of your equipment via retrofittable QR codes (GN-containers & thermoporte®) in the eat**TAINABLE** reusable system, with simultaneous transparent projection of one-way savings.

Loading variants for infinite variety of enjoyment





Scan and discover digitally or from p. 100

DGE-STANDARD AS A YARDSTICK

The filling variants are based on the standard of the German Nutrition Society (Deutsche Gesellschaft für Ernährung e.V.). Based on this, we calculate the necessary number of pieces of our products according to the number of persons.



MOBILE & EFFICIENT

used mobile anywhere as an energy-saving regeneration kitchen without high voltage/connections - for transport, regeneration & serving from one unit.



ECONOMICAL & SUSTAINABLE

With our unique GN-cooking-pot thermoplates® made of SWISS-PLY ECO multilayer material, you save about 30% energy, time and costs in each process step (chilling, regenerating, keeping warm).

MODULAR & **FLEXIBLE**

All thermoport® models are designed to the Gastronorm standard container size for maximum flexibility across the thermoport® range.





• DIGITAL & SECURE

Absolutely temperature-safe transport according to HACCP - whether in the Cook & Chill or Cook & Serve process. Our thermoport® system guarantees you the right temperature everywhere and at all times, from the beginning to the end of your process. Easy & retrofittable connect with the CHECK CLOUD, for a completely digital HACCP documentation, transparent - without

eatTAINABLE

RIEBER'S REUSABLE GN-PROCESS EXPLAINED



GN-EMPTIES - QR CODE SCAN

GN-container QR codes can be scanned automatically and weighed upon return to the kitchen. Managers know exactly where their GN-containers are and how much food is being returned.

RETURN TRANSPORT

Transport container is collected from the customer after consumption and returned to the kitchen.

FOOD SERVING -

CHECK core temperature Digital HACCP core temperature measurement via CHECK CLOUD.

PREPARATION FOR CONSUMPTION

With mobile Rieber preparation equipment depending on the process: · Cook & Chill · Cook & Serve · Cook & Freeze



CONTAINER CLEANING

Professional hygienic cleaning via commercial washer;

QR codes are dishwasher safe.







TRACK YOUR PLASTIC SAVINGS

START_

GN-STORAGE

Provision of GN containers for production process in large kitchen.

COMMERCIAL KITCHEN -CHECK temperature

& core temperature Entire HACCP documentation

can be provided digitally via CHECK CLOUD (core temperature in production & room temperature in cold stores).



We organize your GN-container standard easily and retrofittable via QR code stickers in the digital reusable system. This gives you an overview of your equipment, best food transport & quality at any time and also shows you how much disposable packaging you save every day through your reusable system.

and the CO₂ footprint of your company. Whether caterers, canteens, restaurateurs, butchers, bakers, food retailers

or suppliers - let's all eat(sus)TAINABLE.



DISTRIBUTION - QR CODE SCAN

Filling the GN-containers & cover closure:

- · scan QR codes via food distribution conveyor (scan bridge)
- · or via rack trolley system (scan trolley)

Container QR codes are posted on customer/delivery bill.

PICKING

Loading GN-containers:

(heated/cooled/neutral)

CHECK CLOUD

· or into shelf trolleys

· into insulated thermoport®







Transport container (GN + thermoport® /shelf trolley) is safely isolated and

temperature is documented via CHECK CLOUD (HACCP).

TRANSPORT -

CHECK temperature

eatTAINABLE

for healthy & sustainable food - the only 100 % food safe reusable solution

Our digitally organized reusable sive universal. The perfect reusable system eatTAINABLE, is based on solution in GN-standard for gastronofood-safe stainless steel Gastronorm my, butchers, bakers, food retailers containers, the established industry or suppliers as well as caterers and standard in a wide range of sizes canteens. and variants, whether for to go or delivery, in single portions or in bulk. Always know where your eatTAINABLE can be easily retrofit- GN-containers are! ted for any use via QR code adhe-



Stainless steel benefits

GN-System

high quality 18/10 stainless steel rustproof | heat-resistant food safe | odorless antibacterial dishwasher-safe | hygienic durable | 100 % recyclable

Retrofittable QR code



- Easy to retrofit sticker
- Dishwasher safe & food safe
- ← Temperature resistant -40 °C to +180 °C
- Order no. 94 01 01 32





TRACK YOUR

SYSTEM BENEFITS

- digitally traceable organized without deposit
- with automatic extrapolation of your savings of disposable waste
- **(1)** universal retrofittable for existing or new containers
- without transfer of microplastic from packaging
- in stainless steel GN-containers absolutely food safe and hygienic
- standardized and stackable in GN-size
- in small containers simply scan via the app
- in large containers via automated scan cameras and, if necessary, robot arm
- central dashboard overview of reusable containers
- versatile and flexibly combinable containers and thermoport® options, for single portioning and multiple portions

PLASTIC-SAVINGS!





SINGLE PORTIONS

small portions (up to approx. 900 meals) gastronomy, butchers, bakers, food traders

MULTIPLE PORTIONS

Bulk containers (from approx. 1000 meals) caterers, canteens, hospitals, food suppliers



Scanning via smartphone app / customer card

Container QR code is posted on a customer QR code, applied to customer card, digitally in wallet or app.



Scanning via automatic scan unit

Hardware options:

Scan serving cart, scan shelf cart, scan bridge

Container QR code is booked to location QR code is applied to delivery bill or from merchandise management system.









STAINLESS STEEL FOR YOUR **MICROWAVE**

85 02 27 44



GASTRONORM-CONTAINER SYSTEM

The Rieber benefits

Practical filling height up to the stacking shoulder edge so that the cover can be closed safely for transport without lying in the sauce/dish. With tight corner & base radiuses for even more filling volume.



to special corner design.

Retrofittable QR code sticker, for digital

reusable organization of GN-containers


High and well-defined stacking shoulder, enables perfect stackability with deep stacking, space-saving storage, more safety against tipping over and optimal air circulation thanks

> STAINLESS STEEL BENEFITS

> > rable | 100 % recycla







▶ vaculid® Cover | Storage

via eatTAINABLE.

- ► Waterproof plug-in cover | Transport
- ► Perforated container | Preparation



EFFECTIVE COOKING RESULT

Due to the continuous perforation also in the corner radiuses, as well as the optimal hole size and number, we enable an effective cooking result (with perforated container variant, not for insertion).



COVER HIGHLIGHTS

Most diverse & innovative range of covers - with our No. 1, the waterproof plug-in cover, we guarantee 100% slosh-proofness for absolutely safe transport.



COVER SYSTEM & COMPATIBILITY

For storage, transport, cooking or serving, the right cover variant for every process step. Easily interchangeable and applicable on different GN-container-variants/-materials.





GNONE® - THE DESTACKING REVOLUTION

The embossed stacking lugs on the outside of all 4 corners prevent wedging and enable trouble-free destacking. For more efficient handling, manually and automatically. Also for optimized air circulation when stacked.



COOKING WITH CONTACT HEAT

Standard stainless steel GN container for efficient cooking with direct contact heat (on Ceran/Induction), due to the integrated conductive SWISS-PLY multilayer bottom.



VERSATILE & VARIABLE

The 1/1 basic size of the GN-system fits in and on all Rieber products. Herewith further divisions or doublings like GN 2/1, 2/3, 1/2, 1/3, 1/4, 2/8, 2/4, 1/6 and 1/9 can also be used suitably.




RUGGED & STABLE CONSTRUCTION

With the tightest corner & bottom radiuses in the market for highest dimensional stability, especially in ovens/combi steamers, also higher filling capacity. Intermediate annealing from 100 mm depth additionally increases stability.



HANDY & EFFICIENT HANDLES

Robust, safe and efficient handle options, such as the retractable drop handles for easy insertion, insertion, extraction as well as carrying. Or with stacking folding handles for easy insertion of perforated GN-containers into closed GN-containers.



ORDERING SYSTEM

Universal operating system with efficient arrangement, offers up to 30 % space saving compared to round containers or pots.



12 13

GASTRONORM CONTAINER

Program at a glance



CONTAINER TRACEABILITY

Easy to retrofit QR code sticker for all GN containers. Enables sustainable & digital organization via **eatTAINABLE reusable system** and tracking of GN containers to customer and facility. Robustly usable in commercial kitchens as dishwasher safe, food certified & temperature resistant from -40 °C to +180 °C.

CONTAINER VARIANTS





CONTAINER VARIANTS



Stainless steel thermoplates®eco made of multilayer material

The energy-saving GN-cooking-pot made of multilayer material. For all processes without transferring, such as preparing, chilling, regenerating (on all cooking zones: gas, induction, etc.) and easy to unstack thanks to the stacking shoulder.

Available with drop handles, in GN-sizes 1/1, in 65 mm and 100 mm depth, up to 12 liters capacity.

• SAVE UP TO 30 % ENERGY, TIME AND COSTS

compared to stainless steel GN-containers





Stainless steel with multilayer bottom

For transporting, cooking, frying and serving. The SWISS-PLY multi-layer base transforms it from a conventional GN-container into an energy-efficient cooking pot. Suitable for direct contact heat (Ceran/Induction). Transport temperature of the container in the plastic thermoport® max. +85 °C.

Available with drop handles, in GN 1/1 size & various depths. From 26 to 11.7 liters capacity.

• EFFICIENTLY CONDUCTIVE WITH DIRECT CONTACT HEAT on Ceran/Induction due to SWISS-PLY multilayer base







Stainless Steel GNONE®

For practical & efficient handling, manual or automated. For storing, picking and transporting food. With high-quality stacking shoulder for perfect stackability and air circulation.

Available without/with drop handles, in GN-sizes 1/1, 2/3, 1/2, 1/3 & various depths. From 26 to 2 liters capacity.



Problem-free destacking due to stacking lugs





Stainless steel perforated

Ideal for draining, cooking, simmering or steaming. Without perforation in corner radiuses for use in closed GN-containers (without perforation).

Available with/without stacking handles. With perforation in corner radiuses in GN-sizes 2/1, 2/3, 1/3, 1/8 & various depths. From 55 to 1.3 liters capacity. Without perforation in corner radiuses in GN-sizes 1/1, 1/2, 1/3 & various depths. From 24.7 to 1.7 liters capacity.



due to our unique continuous perforation in corner radiuses



Stainless steel standard

Universally applicable, ideal for storing and transporting food. With high quality stacking shoulder for perfect stackability and air circulation.

Available without/with drop handles, in GN-sizes 2/1 to 1/9 & various depths. From 55 to 0.5 liters capacity.

THE UNIVERSAL CLASSIC suitable for every application





Transparent plastic

Ideal for storing and presenting cold foods, such as salads, vegetables/fruit, and for preparation. Cleaning with plastic suitable detergent & rinsing agent. Made of food safe & transparent plastic, fully compatible with stainless steel GN containers.

Available without handles, in GN-sizes 1/1, 1/2, 1/3, 1/4, 2/8, 2/4, 1/6 & various depths. From 21 to 0.8 liters capacity.



 STORAGE & PRESENTATION OF COLD FOODS

like salads, vegetables/fruit as well as for preparation




Stainless steel for vacuuming


For sustainable vacuuming without disposable plastic bags in combination with our vaculid® vacuum cover. With high-quality stacking shoulder for perfect stackability and air circulation in thicker & more stable design.

Available without handles, in GN-sizes 1/2, 1/3, 1/6 & different depths. From 8.4 to 0.9 liters capacity.

9 PLASTIC-FREE VACUUMING

directly in the food-safe GN container. Applicable with all vacuum pumps (hand/chamber/hose pump)



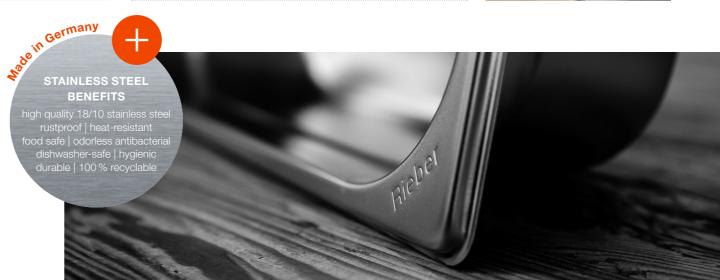

Stainless steel GN-container without handles



Absolutely hygienic, food safe, odorless, antibacterial, stainless, dishwasher safe, heat, cold & acid resistant. Tight corner radiuses for stability & volume, high quality stacking shoulder (from 55 mm) for optimal air circulation, GNONE® models with 4 corner stacking lugs for easy unstacking (1/1, 2/3, 1/2 from 55-200 mm & 1/3 from 65-200 mm).



155

GN-standard	Depth	Liter	Order no.
	mm	L	
GN 2/1	200	55,0	84010101
	150	41,0	84010102
	100	27,0	84010103
	65	17,0	84010104
650 x 530 mm	40	10,0	84010105
	20	-	84010106



GN-standard	Depth	Liter	Oraer no.
	mm	L	
GN 1/1	200	26,0	84010107
	150	18,4	84010108
GNONE	100	11,7	84010109
	65	7,0	84010110
325 x 530 mm	55	5,6	84010159
	40	3,4	84010111
	20	-	84010112



GN-standard	Depth	Liter	Order no.
	mm	L	
GN 2/3	200	15,3	84010113
	150	11,8	84010114
GNONE	100	7,4	84010115
	65	4,3	84010116
325 x 352 mm	40	2,4	84010117
	20	-	84010118



GN-standard	Depth	Liter	Order no.
	mm	L	
GN 1/2	200	10,9	84010119
	150	8,4	84010120
	100	5,3	84010121
GNONE	65	3,3	84010122
325 x 265 mm	55	2,6	84010160
	40	1,7	84010123
	20	-	84010124

GN-standard	Depth	Liter	Order no.
	mm	L	
GN 1/3	200	6,6	84010125
	150	4,9	84010126
	100	3,3	84010127
GNONE	65	2,0	84010128
325 x 176 mm	40	1,0	84010129
	20	-	84010130
GN-standard	Depth	Liter	Order no.
GN-Standard	mm	L	Order no.
GN 1/4	200	5,0	84010131
	150	3,6	84010132
	100	2,3	84010133
	65	1,5	84010134
162 x 265 mm	20	-	84010135
	20		04010100
GN-standard	Depth	Liter	Order no.
	mm	L	
GN 2/8	150	3,9	84010136
	100	2,6	84010137
	65	1,3	84010138
	20	-	84010139
325 x 131 mm			
GN-standard	Depth	Liter	Order no.
GN-standard	Depth mm	Liter	Order no.
GN-standard			Order no. 84010158
	mm	L	
	mm 150	L 8,4	84010158
GN 2/4	mm 150 100	L 8,4 5,3	84010158 84010157
	mm 150 100 65	8,4 5,3 3,3	84010158 84010157 84010156
GN 2/4	mm 150 100 65 40	8,4 5,3 3,3 1,7	84010158 84010157 84010156 84010155
GN 2/4	mm 150 100 65 40	8,4 5,3 3,3 1,7	84010158 84010157 84010156 84010155
GN 2/4	mm 150 100 65 40 20	L 8,4 5,3 3,3 1,7 - Liter L	84010158 84010157 84010156 84010155 84010154
GN 2/4	mm 150 100 65 40 20 Depth	L 8,4 5,3 3,3 1,7 -	84010158 84010157 84010156 84010155 84010154
GN 2/4 162 x 530 mm GN-standard	mm 150 100 65 40 20 Depth mm	L 8,4 5,3 3,3 1,7 - Liter L	84010158 84010157 84010156 84010155 84010154 Order no.
GN 2/4 162 x 530 mm GN-standard	mm 150 100 65 40 20 Depth mm 200	L 8,4 5,3 3,3 1,7 - - Liter L 2,8	84010158 84010157 84010156 84010155 84010154 Order no.
GN 2/4 In the standard GN 1/6	mm 150 100 65 40 20 Depth mm 200 150	L 8,4 5,3 3,3 1,7 - - Liter L 2,8 2,1	84010158 84010157 84010156 84010155 84010154 Order no. 84010140 84010141
GN 2/4 162 x 530 mm GN-standard	mm 150 100 65 40 20 Depth mm 200 150 100	L 8,4 5,3 3,3 1,7 - - Liter L 2,8 2,1 1,4	84010158 84010157 84010156 84010155 84010154 Order no. 84010140 84010141 84010142
GN 2/4 162 x 530 mm GN-standard GN 1/6 162 x 176 mm	mm 150 100 65 40 20 Depth mm 200 150 100 65	L 8,4 5,3 3,3 1,7 - - Liter L 2,8 2,1 1,4 0,9	84010158 84010157 84010156 84010155 84010154 Order no. 84010140 84010141 84010142 84010143
GN 2/4 In the standard GN 1/6	mm 150 100 65 40 20 Depth mm 200 150 100 65	L 8,4 5,3 3,3 1,7 - - Liter L 2,8 2,1 1,4 0,9	84010158 84010157 84010156 84010155 84010154 Order no. 84010140 84010141 84010142
GN 2/4 GN-standard GN 1/6 GN 1/6 GN-standard GN-standard	mm 150 100 65 40 20 Depth mm 200 150 100 65 Depth mm	L 8,4 5,3 3,3 1,7 - - Liter L 2,8 2,1 1,4 0,9	84010158 84010157 84010156 84010155 84010154 Order no. 84010140 84010141 84010142 84010143 Order no.
GN 2/4 162 x 530 mm GN-standard GN 1/6 162 x 176 mm	mm 150 100 65 40 20 Depth mm 200 150 100 65 Depth mm 100	L 8,4 5,3 3,3 1,7 - - Liter L 2,8 2,1 1,4 0,9	84010158 84010157 84010156 84010155 84010154 Order no. 84010141 84010142 84010143 Order no. 84010144
GN 2/4 GN-standard GN 1/6 GN 1/6 GN-standard GN-standard	mm 150 100 65 40 20 Depth mm 200 150 100 65 Depth mm	L 8,4 5,3 3,3 1,7 - - Liter L 2,8 2,1 1,4 0,9	84010158 84010157 84010156 84010155 84010154 Order no. 84010140 84010141 84010142 84010143 Order no.
GN 2/4 GN-standard GN 1/6 GN 1/6 GN-standard GN-standard	mm 150 100 65 40 20 Depth mm 200 150 100 65 Depth mm 100	L 8,4 5,3 3,3 1,7 - - Liter L 2,8 2,1 1,4 0,9	84010158 84010157 84010156 84010155 84010154 Order no. 84010141 84010142 84010143 Order no. 84010144
GN 2/4 GN-standard GN 1/6 GN 1/6 GN-standard GN-standard	mm 150 100 65 40 20 Depth mm 200 150 100 65 Depth mm 100	L 8,4 5,3 3,3 1,7 - - Liter L 2,8 2,1 1,4 0,9	84010158 84010157 84010156 84010155 84010154 Order no. 84010141 84010142 84010143 Order no. 84010144
GN 2/4 GN-standard GN 1/6 GN-standard GN-standard GN-standard	mm 150 100 65 40 20 Depth mm 200 150 100 65 Depth mm 100	L 8,4 5,3 3,3 1,7 - - Liter L 2,8 2,1 1,4 0,9	84010158 84010157 84010156 84010155 84010154 Order no. 84010141 84010142 84010143 Order no. 84010144













Stainless steel GN-container with retractable handles

Order no.

Optimal portability, hygienic, food safe, odorless, antibacterial, stainless, dishwasher safe, heat, cold & acid resistant. Tight corner radiuses for stability & volume, high quality stacking shoulder (from 55 mm) for optimal air circulation, GNONE® models with 4 corner stacking lugs for easy unstacking (1/1, 1/2 from 55-200 mm & 2/3, 1/3 from 65-200 mm).

GN-standard

Depth



GN-standard	Depth	Liter	Order no.
	mm	L	
GN 1/1	200	26,0	84010201
	150	18,4	84010202
	100	11,7	84010203
	65	7,0	84010204
325 x 530 mm	55	5,6	84010259



	mm	L	
GN 2/3	200	15,3	84010205
	150	11,8	84010206
	100	7,4	84010207
25 x 352 mm	65	4,3	84010208



GN-Standard	Depth	Liter	Order no.
	mm	L	
GN 1/2	200	10,9	84010209
	150	8,4	84010210
	100	5,3	84010211
	65	3,3	84010212
325 x 265 mm	55	2,6	84010260



GN-standard	Depth	Liter	Order no.
	mm	L	
GN 1/3	200	6,6	84010213
	150	4,9	84010214
	100	3,3	84010215
	65	2,0	84010216
325 x 176 mm			



GN-standard	Depth	Liter	Order no.
	mm	L	
GN 1/4	200	5,0	84010217
	150	3,6	84010218
	100	2,3	84010219
162 x 265 mm	65	1,5	84010220

GN-standard	Depth	Liter	Order no.
	mm	L	
GN 2/8	200	5,6	84010242
	150	3,9	84010221
	100	2,6	84010222
	65	1,3	84010223
325 x 131 mm			



GN-standard	Depth	Liter	Order no.
	mm	L	
GN 2/4	150	8,4	84010240
	100	5,3	84010239
	65	3,3	84010238
	40	1,7	84010237
162 x 530 mm			



GN-standard	Depth	Liter	Order no.
	mm	L	
GN 1/6	200	2,8	84010224
	150	2,1	84010225
	100	1,4	84010226
162 x 176 mm	65	0,9	84010227



GN-standard	Depth	Liter	Order no.
	mm	L	
GN 1/9	100	1,0	84010228
	65	1,0	84010229
108 x 176 mm			





Stainless steel GN-container for vacuuming

Without handles in use with vacuum GN-cover, for longer food shelf life without disposable bags. Absolutely hygienic, food safe, odorless, antibacterial, stainless, dishwasher safe, heat, cold & acid resistant. Tight corner radiuses for stability & volume, high quality stacking shoulder (from 55 mm) for optimal stackability & air circulation.





GNONE°

Depth	Liter	Order no.
mm	L	
150	8,4	84010199
100	5,3	84010198
65	3,3	84010195
	mm 150 100	mm L 150 8,4 100 5,3



GN-standard	Depth	Liter	Order no.
	mm	L	
GN 1/3	100	3,3	84010127
(GNONE) 325 x 176 mm	65	2,0	84010183



GN-standard	Depth	Liter	Order no.
	mm	L	
GN 1/6	100	1,4	84010142
	65	0,9	84010143
162 x 176 mm			



Stainless steel GN-container perforated not for insertion



Perforated stainless steel container not for insertion - optimal for rinsing, washing, pouring or draining food. Absolutely hygienic, food-safe, odorless, antibacterial, stainless, dishwasher-safe, as well as enormously heat-, coldand acid-resistant and thus universally applicable.



84020137

GN-standard	Depth	Liter	Order no.
	mm	L	
GN 2/1	200	55,0	84020101
	150	41,0	84020102
	100	27,0	84020103
	65	17,0	84020104
850 x 530 mm	40	10,0	84020140

GN-standard	Depth	Liter	Order no.
	mm	L	
GN 2/3	200	15,3	84020109
	100	7,4	84020111
	65	4,3	84020112
	40	2,4	84020113
325 x 352 mm			

GN-standard	Depth	Liter	Order no.
	mm	L	
GN 1/3	200	6,6	84020114
	150	4,9	84020115
	100	3,3	84020116
	65	2,0	84020117
325 x 176 mm	40	1,0	84020118
	20	-	84020139

GN-standard	Depth	Liter	Order no.
	mm	L	
GN 2/8	65	1,3	84020150





Stainless steel GN-container perforated for insertion - without handles

Perforated design for insertion into closed GN-containers – ideal for cooking, steaming & blanching vegetables or for draining. The perforation allows for shortened cooking time, as well as faster cooling, dishwasher safe.



	 Tun.	

GN-standard	Depth	Liter	Order no.
	mm	L	
GN 1/1	190	26,0	84020105
	140	18,4	84020106
	90	11,7	84020107
	50	7,0	84020108
325 x 530 mm	20	-	84020136



GN-standard	Depth	Liter	Order no.
	mm	L	
GN 1/2	190	10,9	84020119
	140	8,4	84020120
	90	5,3	84020121
325 x 265 mm	50	3,3	84020122
020 X 200 IIIII			



GN-standard	Depth	Liter	Order no.
	mm	L	
GN 1/3	90	6,6	84020127
	55	4,9	84020126
325 x 176 mm			



Stainless steel GN-container perforated for insertion

- with stacking folding handles

Perforated & with stacking folding handle, for easy insertion into closed GN-containers, ideal for cooking, steaming & blanching vegetables & for draining, with perforation for shortened cooking time & faster cooling. Absolutelyhygienic, food safe, odorless, antibacterial, stainless, dishwasher safe, as well as enormously heat, cold and acid resistant.



GN-standard	Depth	Liter	Order no.
	mm	L	
GN 1/1	190	26,0	84020205
	140	18,4	84020206
	90	11,7	84020207
	50	7,0	84020208
325 x 530 mm			



Order no.	Liter	Depth	GN-standard
	L	mm	
84020209	10,9	190	GN 1/2
84020210	8,4	140	
84020211	5,3	90	325 x 285 mm
	,		325 x 265 mm





All prices in Euro without VAT. for settlement with the specialized trade. Our general delivery and order conditions apply. Subject to technical and price changes. Valid from 01.04.2022.

GN-side-dish Microwave



GN-tray made of stainless steel, with which food / side dishes can be quickly heated in the standard microwave. Optimal size for single portioning in GN-size 1/6, filling volume 0.9 L. Hygienic, food safe, odorless, antibacterial, tight corner radiuses for more stability & volume, high quality stacking shoulder for perfect stackability & air circulation.



More info

GN-side-dish 1/6 60 mm microwave

Stainless steel GN-tray - for food/supplements to be heated in commercial microwave oven in single portion (0.9 L). Hygienic, food safe, odorless, antibacterial, tight corner radiuses for more stability & volume, high quality stacking shoulder for perfect stackability & air circulation.

Dimension	Weight	Order no.
mm	kg	
159,5 x 146 x 60	0,2	85022097

nkrowno

Set GN-side-dish 1/6 microwave+cover

Stainless steel GN-tray including waterproof poly dome cover - for food/supplements to be heated in commercial microwave oven in single portion (0.9 L). Hygienic, food safe, odorless, antibacterial, tight corner radiuses for more stability & volume, high quality stacking shoulder for perfect stackability & air circulation.


Dimension	Weight	Order no.
mm	kg	
159,5 x 146 x 82	0,3	85022744







micreawave



microwave

GN-Accessories

Practical additions to your GN-container-system – from universal slide-in trays, special cutlery & spice containers, matching shelves, robust grids to cross & longitudinal dividers so that smaller GN-sizes can also be used.





GN-insertion-tray 2/1 021



GN-standard	Weight	Order no.
	kg	
GN 2/1	2,7	84100101

GN-insertion-tray 1/1 066



GN-standard	Weight	Order no.
	kg	
GN 1/1	1,4	84100106

GN-insertion-tray 1/1 041



GN-standard Weight		Order no.
	kg	
GN 1/1	1,2	84100105

GN-insertion-tray 1/1 021



GN-standard	Weight	Order no.
	kg	
GN 1/1	1,1	84100104

GN-insertion-tray 2/3 021



GN-standard	Weight	Order no.
	kg	
GN 2/3	0,7	84100107

GN-insertion-tray 2/3 041



GN-standard	Weight	Order no.
	kg	
GN 2/3	0,9	84100108

GN-insertion-tray 1/2 041

GN-standard	Weight	Order no.
	kg	
GN 1/2	0,6	84100111



GN-insertion-tray 1/2 021

GN-standard	Weight	Order no.
	kg	
GN 1/2	0,6	84100110



GN-container 1/1 060 EG - handles

GN-standard	Weight	Order no.
	kg	
GN 1/1	1,3	84010301



GN-cutlery-tray 1/4 with cover

GN-standard	Weight	Order no.
	kg	
GN 1/4	0,7	84180101



GN-spice-tray 1/6

GN-standard	Weight	Order no.
	kg	
GN 1/6	0,5	84160101



GN-spice-tray 1/6 with cover

GN-standard	Weight	Order no.
	kg	
GN 1/6	0,6	84170101



GN-spice-tray 1/9

GN-standard	Weight	Order no.
	kg	
GN 1/9	0,3	84160102



GN-insert-shelf 2/1 perforated

GN-standard	Weight	Order no.
	kg	
GN 2/1	2,9	84130101



GN-insert-shelf 1/1 perforated



GN-standard	Weight kg	Order no
GN 1/1	0,8	8413010

Insert-shelf 1/1 perforated polycarbonate



GN-standard	Weight	Order no.
	kg	
GN 1/1	0,4	84220101

GN-insert-shelf 1/2 perforated



GN-standard	Weight	Order no.
	kg	
GN 1/2	0,4	84130104

Insert-shelf 1/2 perforated polycarbonate



GN-standard	Weight	Order no.
	kg	
GN 1/2	0,2	84220102

GN-insert-shelf 1/3 perforated




GN-standard	Weight	Order no.
	kg	
GN 1/3	0,2	84130105

Insert-shelf 1/3 perforated polycarbonate




GN-standard	Weight	Order no.
	kg	
GN 1/3	0,1	84220103

Stainless-steel-grate GN 2/1 530x650 mm



GN-standard	Weight	Order no.
	kg	
GN 2/1	2,1	84140101

Stainless-steel-grate GN 2/1 L - 530x650 mm




GN-standard	Weight	Order no.
	kg	
GN 2/1	1,4	84140106

Stainless-steel-grate GN 1/1 325x530 mm

GN-standard	Weight	Order no.
	kg	
GN 1/1	1,3	84140102


Stainless-steel-grate GN 1/1 L - 325x530 mm

GN-standard	Weight	Order no.
	kg	
GN 1/1	0,7	84140105



Stainless-steel-grate GN 2/3 352x325 mm

GN-standard	Weight	Order no.
	kg	
GN 2/3	0,6	84140138



GN-Longitudinal-bar - 528 mm

GN-standard	Weight	Order no.
	kg	
-	0,2	84190101



GN-Crossbar - 325 mm

GN-standard	Weight	Order no.
	kg	
-	0,1	84190201



GN-Crossbar - thermoport® 50K/100K

GN-standard	Weight	Order no.
	kg	
_	0.1	84190202





GASTRONORM COVERS

Program at a glance



CONTAINER TRACKING

Easy to retrofit QR code sticker for all GN containers. Enables sustainable & digital organization via **eatTAINABLE reusable system** and tracking of GN containers to customer and facility. Robustly usable in commercial kitchens as dishwasher safe, food certified & temperature resistant



RETROFIT NOW!

COVER VARIANTS

OUR NO.1




For safe transport, storage, cooking and regeneration. Abso-

Available in GN-sizes 1/1, 2/3, 1/2, 1/3, 1/4, 2/8, 1/6, 1/9.**

• FOR 100 % SLOSH-PROOF TRANSPORT with heat-resistant, food-safe sealing lip

vaculid® GN-vacuum-cover made of stainless steel




Available in GN-sizes GN 1/2, 1/3 and 1/6.

• FOR PROFESSIONAL VACUUM PUMPS

(hand/chamber/hose pump)

GN-plug-in-cover made of stainless steel



Available with/without handle cut-out, in GN-sizes 1/1, 2/3, 1/2, 1/3, 1/4, 2/8, 1/6, 1/9.*

OPTIMAL FOR SOLID & VISCOUS FOODS

like potatoes, porridge, pasta or rice

Stainless steel flat cover with recessed grip

All-round flat cover resting on container rim, robust, handy, stackable & dishwasher safe, with practical recessed grip suitable for stainless steel GN-containers.

Available without cut-outs, with handle &/or spoon cut-outs, in GN-sizes 2/1, 1/1, 2/3, 1/2, 1/3, 1/4, 2/8, 1/6, 1/9.

OPTIMAL AIR & STEAM CIRCULATION

for crispy food (fries/schnitzel etc.)

Stainless steel GN-hinged-flat-cover

Applicable on stainless steel GN containers. Optimal energy efficiency for ladle applications.

Available without cutout, with handle or spoon cutout or with handle & spoon cutout, in GN sizes 1/1 and 1/2.

OPTIMAL ENERGY EFFICIENT OUTPUT

lower temperature loss due to half opening

* Not suitable for GN-container depths of 20 and 40 mm

*** Plastic (Tritan™ copolyester)




Stainless steel waterproof GN-plug-in-cover

lutely tightly sealed, can be used up to +180 °C, also in combi can be used.





vaculid® 1/6 1/6 GN-vacuum-cover made of transparent PET***



6 FOR VACUUM SEAL

& Sous Vide cooking without disposable plastic bags

GN-dome-cover 1/6 for hand-vacuum made of plastic

and slosh-proof sealing lip. Made of transparent and foodsafe plastic, for 1/6 GN-containers without drop handles, from -20 to +80 °C.

Available in GN-size 1/6.

PRACTICAL FOR TAKE AWAY FOOD for storage and transport

GN-flat-cover made of transparent plastic

stainless steel and plastic GN-containers, usable up to +180 °C. Cleaning with plastic suitable detergent & rinsing agent.

IDEAL FOR COLD DISHES




With dosing dispenser function, safely & hygienically closed with sealing lip and swiveling spout, up to +180 °C. For two GN-container depths up to max. 40 g per pumping operation.

Available in GN-sizes 1/2 and 1/3.



for dispensing ketchup, mustard, sauces etc., directly from stainless steel GN-containers



Available in GN size GN 1/6.

With round sealing plug, for easy release of a natural vacuum

Made of food-safe & transparent plastic, fully compatible with

Available in GN 1/1, 2/3, 1/2, 1/3, 1/4, 2/8, 2/4, 1/6, 1/9.*

such as salads, vegetables and fruit













^{** 1/9} cover does not fit 1/9 containers with drop handle. Not suitable for GN-container depths of 20 and 40 mm.


GN-cover watertight stainless steel - with sealing lip & recessed grip



100% slosh-proof transport, with heat-resistant & food-safe sealing lip, surrounding vulcanized, absolutely hygienic without dirt joints. For use in combi steamers, navioven, hybrid kitchen as well as other preparation devices. Robust & dishwasher safe - in use with all GN-containers & thermoplates® (not suitable for depths 20, 40 mm).



More info



GN-standard	Order no.
GN 1/1	84080101
GN 1/2	84080103
GN 1/3	84080104
GN 1/4	84080105
GN 1/6	84080107
GN 1/9	85022016
GN 2/3	84080102
GN 2/8	84080106

Accessories for all products

	Order no.
QR code label for returnable system eatTAINABLE	94010132
QR code label for customer card eatTAINABLE	94010125
QR-Code label for CHECK, 46 x 23 mm	94010114



All prices in Euro without VAT. for settlement with the specialized trade. Our general delivery and order conditions apply. Subject to technical and price changes. Valid from 01.04.2022.

GN-cover Dome-cover for hand-vacuum



The transparent GN-dome-cover made of Tritan ™ copolyester with black circumferential waterproof sealing lip and vent plug, for easy opening of a natural hand vacuum. For airtight & watertight storage, transport & appealing presentation of food in a GN 1/6 tray (available in different depths), made of hygienic & food-safe stainless steel - perfect for togo food.



More info

GN-standard	Material	Order no.
GN 1/6	Tritan ™ Copolyester	84200166





All prices in Euro without VAT. for settlement with the specialized trade. Our general delivery and order conditions apply. Subject to technical and price changes. Valid from 01.04.2022.


GN-cover vaculid®- for vacuuming with sealing lip

The vacuumable GN-cover for storing, transporting and cooking. Allows easy & reliable vacuum with chamber/ peristaltic pump, robust & dishwasher safe, protects food in GN-reusable-system & makes it last longer - in use with stainless steel GN-containers/thermoplates® without handles in sizes 1/2, 1/3 & 1/6 up to max. 100 mm depth.





GN-standard	Material	Order no.
GN 1/2	Stainless steel 1.4301 (CNS)	84011045
GN 1/3	Stainless steel 1.4301 (CNS)	84011042
GN 1/6	Stainless steel 1.4301 (CNS)	84011041
GN 1/6	Tritan ™ Copolyester	84200165

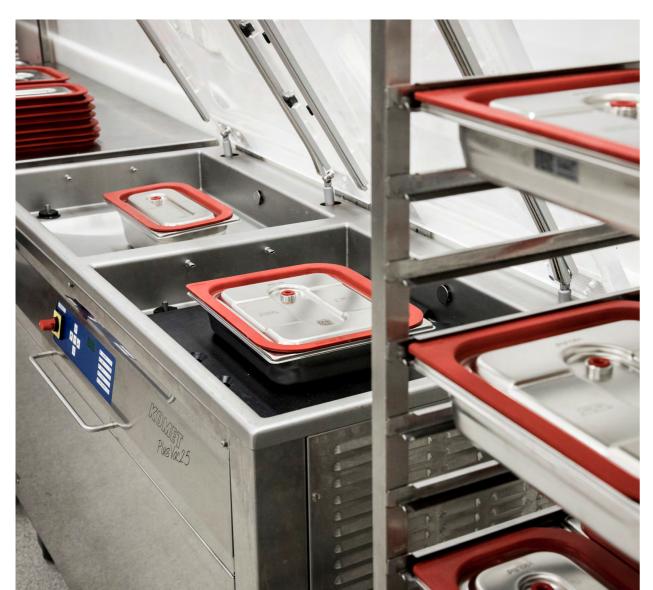

All prices in Euro without VAT. for settlement with the specialized trade. Our general delivery and order conditions apply. Subject to technical and price changes. Valid from 01.04.2022.

GN-cover with dosing dispenser function & sealing lip

Made of stainless steel with sealing lip & dosing dispenser function through integrated pump attachment (adjustable to 2 GN-depths) & swiveling spout. For dispensing ketchup, mustard, mayonnaise, sauces etc. in GN-reusable. Precisely adjustable up to max. 40 g per pumping operation – in use compatible with GN-containers in sizes 1/2 & 1/3, in depths 150 & 200 mm.





GN-standard	Order no.
GN 1/2	84011022
GN 1/3	84011023





All prices in Euro without VAT. for settlement with the specialized trade. Our general delivery and order conditions apply. Subject to technical and price changes. Valid from 01.04.2022.

GN-flat-cover made of stainless steel

The GN-flat-cover made of stainless steel, for hygienic covering of food / dishes - handy with practical recessed grip, stackable & dishwasher safe – in use with all stainless steel GN containers, not suitable for GN-thermoplates®.





More info	,

3	

Version	GN-standard	Order no.
without cutouts	GN 1/1	84030101
	GN 1/2	84030103
	GN 1/3	84030104
	GN 1/4	84030105
	GN 1/6	84030106
	GN 1/9	84030107
	GN 2/1	84030124
	GN 2/3	84030102
	GN 2/4	84030108
	GN 2/8	84030123




Version	GN-standard	Order no.
with handle & spoon cutout	GN 1/1	84030401
	GN 1/2	84030403
	GN 1/3	84030404
	GN 1/4	84030405
	GN 1/6	84030406
	GN 1/9	84030407
	GN 2/3	84030402
	GN 2/4	84030408
	GN 2/8	84030423
	•	•



Version	GN-standard	Order no.
with handle cutouts	GN 1/1	84030301
	GN 1/2	84030303
	GN 1/3	84030304
	GN 1/4	84030305
	GN 1/6	84030306
	GN 1/9	84030307
	GN 2/3	84030302
	GN 2/4	84030308
	GN 2/8	84030317

Version	GN-standard	Order no
with spoon cutout	GN 1/1	84030201
	GN 1/2	84030203
	GN 1/3	84030204
	GN 1/4	84030205
	GN 1/6	84030206
	GN 1/9	84030207
	GN 2/3	84030202
	GN 2/4	84030208
	GN 2/8	84030217



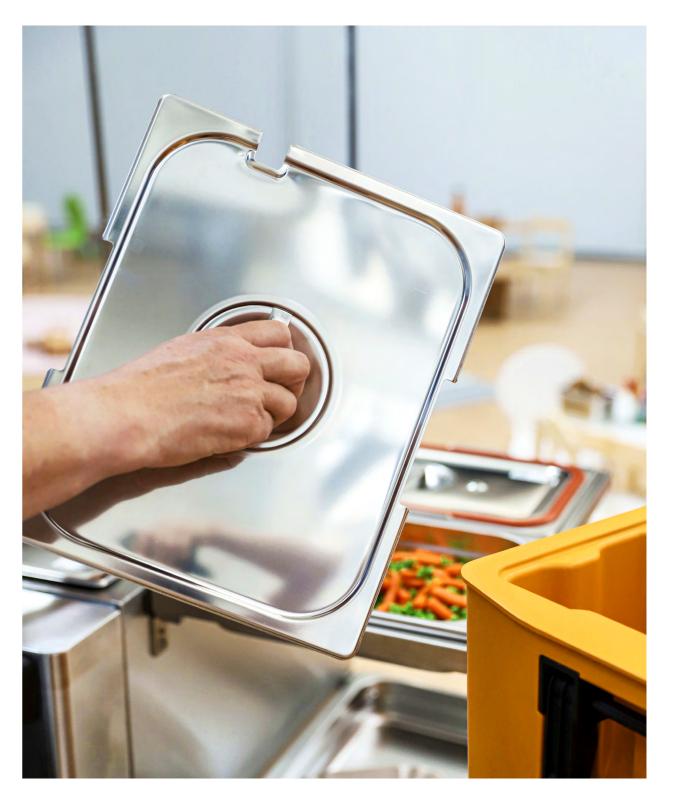

All prices in Euro without VAT. for settlement with the specialized trade. Our general delivery and order conditions apply. Subject to technical and price changes. Valid from 01.04.2022.

GN-flat-cover made of polycarbonate

The transparent GN-flat-cover made of polycarbonate - optimal for hygienic storage or presentation of cold foods, such as salad, vegetables/fruit. For cleaning polycarbonate use only suitable means (not acid resistant) – in application with stainless steel/polycarbonate GN-containers (not suitable for GN- containers with depths 20, 40 mm).







Version	GN-standard	Order no.
without cutouts	GN 1/1	84200105
	GN 1/2	84200106
	GN 1/3	84200107
	GN 1/4	84200108
	GN 1/6	84200109
	GN 1/9	84200113
	GN 2/3	84200114
	GN 2/4	84200111
	GN 2/8	84200112



All prices in Euro without VAT. for settlement with the specialized trade. Our general delivery and order conditions apply. Subject to technical and price changes. Valid from 01.04.2022.

GN-hinge-flat-cover made of stainless steel

The center hinged GN-flat-cover, made of stainless steel. Allows minimal temperature loss when opening, as it can only be opened halfway, practical in use and easy to clean, dishwasher safe - in use with all stainless steel GNcontainers, not suitable for GN-thermoplates®.



Version	GN-standard	Order no.
with handle & spoon cutout	GN 1/1	84040401
	GN 1/2	84040402



Version	GN-standard	Order no.
with handle cutouts	GN 1/1	84040301
	GN 1/2	84040302



Version	GN-standard	Order no.
with spoon cutout	GN 1/1	84040201
	GN 1/2	84040202



Version	GN-standard	Order no.
without cutouts	GN 1/1	84040101
	GN 1/2	84040102



GN-plug-in-cover made of stainless steel

The stackable stainless steel GN-plug-in-cover, practical, robust & dishwasher-safe, for hygienic covering of food/meals – in use with stainless steel GNcontainers (not suitable for depths 20, 40 mm & thermoplates® in GN-size 1/1).









Version	GN-standard	Order no.
with handle cutouts	GN 1/1	84090201
	GN 1/2	84090203
	GN 1/3	84090204
	GN 1/6	84090207
	GN 2/8	84090206



Version	GN-standard	Order no.
without cutouts	GN 1/1	84090101
	GN 1/2	84090103
	GN 1/3	84090104
	GN 1/6	84090107
	GN 1/9	84090108
	GN 2/3	84090102
	GN 2/8	84090106



	GN 1/9	84090108
	GN 2/3	84090102
	GN 2/8	84090106
Version	GN-standard	Order no
	01144	0.400004
with recessed grip	GN 1/1	84090210





All prices in Euro without VAT. for settlement with the specialized trade. Our general delivery and order conditions apply. Subject to technical and price changes. Valid from 01.04.2022.

THERMOPLATES® GN-COOKING-POT

The Rieber benefits





Uniform conductivity of the aluminum core, right to the edge, perfectly tempered everywhere even with selective energy supply.



Can be used throughout the entire process without repackaging—consistently in GN-format for greater handling efficiency.



Multilayer material with an aluminum core between two stainless steel layers, combines the hygienic stainless steel benefits with the thermal aluminum benefits.

SWISS | PLY®



- ► Cooking cover | Preparation
- ► Buffet cover | Output
- ▶ vaculid® Cover | Storage
- ► Waterproof plug-in cover | Transport
- ▶ Perforated container | Preparation



COVER SYSTEM & COMPATIBILITY

The right cover variant for every process step, which can be changed compatibly, whether for storage, transport, cooking or serving. Diverse options from the GN-cover standard program - multifunctionally applicable.



SQUARE VARIANT

The thermoplates® with square corners are suitable like conventional GN-containers, precisely fitting for hanging in all dispensing elements or mobile ladling systems – without heat or cold escaping via the corners.



ROUNDED VARIANT

thermoplates® C in catering design with rounded corners offer the perfect & stylish buffet solution matched to our mobile tabletop kitchen K|POT®. Now also digitally controllable via our Rieber CONNECT app.



STACKING FUNCTION

Variant with high-quality stacking shoulder for optimum handling, allowing the thermoplates® to be stacked and unstacked safely, easily and space-efficiently. With conical shape for optimum air circulation.



TEPPANYAKI EFFICIENT GRILLING

Mobile grill plate made of SWISS-PLY material for excellent grilling results on induction/ceran hobs and maximum application flexibility. The teppanyaki plate can be changed in seconds and cleaned in the dishwasher.



ENERGY SAVING

Up to 10x higher conductivity (cold/hot) compared to conventional stainless steel, due to the aluminum core, for significant energy savings and efficient preparation.




POTENTIAL SAVINGS COOK & CHILL

In Cook & Chill processes, the stackable thermoplates® guarantee more output in the same amount of time and enormous savings potential in each process step (up to 30 % more filling quantity when cooling and up to 60 % time savings when heating).



OPTIMAL PORTABLE WITH HANDLES

Available with permanently mounted, sturdy handles for easy insertion, extraction, carrying and setting in the output.



SURFACE VARIANTS

Depending on the application, with a high-quality non-stick coating (PFO and PFOA-free) or robust and scratch-resistant with a nano-surface treatment*.

*The robust nano-surface with non-stick effect, for electric, ceramic, induction & gas cooking zones as well as in the combi steamer/oven. With non-stick coating no application on gas possible.



42 43

GN-COOKING-POT thermoplates® Program at a glance







SWISSI PLY CO₂-savings with ECO multilayer material

The SWISS-PLY multilayer material turns the GN container into an energy-efficient cooking pot. Cook, simmer, steam, wok, fry, deep fry, bake, store, transport, dispense & keep cool without having to transfer.

30 % TIME, ENERGY & COST SAVINGS



thermoplates® COOKING POT VARIANTS



SWISSIIPLY

SWISSIIPLY

SWISSI IPLY


nano with square corners

Robust & scratch resistant nano surface, for direct contact heat on electric/ceramic/induction/gas/combi steamer, with fast, even heat/cold distribution. From -20 °C to +220 °C.

Available without/with fixed handles/drop handles in GN-sizes 1/1, 2/3, 1/2, 1/3 & various depths. From 10 to 1 liter capacity.

• NO TEMPERATURE LOSS VIA ROUND CORNERS

Optimal for hanging in output & production




Excellent non-stick, for direct contact heat on electric/ceran/induction/combined steamer, with fast & even heat/cold distribution. From -20 °C to +220 °C.

Available without/with fixed handles, in GN-sizes 1/1, 2/3, 1/2, 1/3 & various depths. From 10 to 1 liter capacity.

NO TEMPERATURE LOSS VIA ROUND CORNERS


Optimal for hanging in output & production

nano with round corners



Available in GN-sizes 1/1, 2/3, 1/2, 1/3, 1/6 & various depths. From 10 to 0.4 liters capacity.

coated with round corners



Available in GN-sizes 1/1, 2/3, 1/2, 1/3, 1/6 & various depths. From 10 to 0.4 liters capacity.















thermoplates® COOKING POT & teppanyaki-VARIANTS

The energy-saving GN-cooking-pot made of multilayer material. For all processes such as preparing, chilling, regenerating without transferring, easy to unstack due to the stacking shoulder.

Stainless steel thermoplates®eco made of multilayer material

With drop handles, in GN-sizes 1/1, in 65 mm and 100 mm depth, up to 12 liters capacity.

 SAVE UP TO 30 % ENERGY, TIME AND COSTS compared to stainless steel GN-containers

SWISS-PLY multilaver bottom

SWISS-PLY multilayer bottom from GN container to energy-efficient cooking pot. Transport temperature max. +85 °C in a plastic thermoport®. Suitable for direct contact heat.

Available with drop handles, in GN 1/1 size & variable depths. From 26 to 11.7 liters capacity.

© EFFICIENT CONDUCTIVE DIRECT CONTACT HEAT on Ceran/Induction due to SWISS-PLY multilayer bottom

teppanyaki grill plate coated

Mobile griddle plate made of SWISS-PLY multi-layer material, for energy efficient grilling & frying, with non-stick effect. For direct contact heat on electric/ceran/induction with fast, even heat/cold distribution. From -20 °C to +220 °C.

With/without fixed handles, in GN 1/1, 2/3, 1/2 in depth 20 mm.

MOBILE CHANGEOVER IN SECONDS

from teppanyaki griddle to thermoplates® cooking pot

teppanyaki grill plate nano

Mobile grill plate made of SWISS-PLY material, energy efficient grilling & frying with robust & scratch resistant nano surface. For contact heat on electric/ceran/induction/gas with fast, even heat/cold distribution. From -20 °C to +220 °C.

With/without fixed handles, in GN 1/1, 2/3, 1/2 in depth 20 mm.

• MOBILE CHANGEOVER IN SECONDS

from teppanyaki griddle to thermoplates® cooking pot











For even & energy efficient heat transfer and better food quality.



Chafing Dish









KIPOT[®]






GN-cooking-pot thermoplates® nano square - without handles

With non-stick surface, 2,6 mm SWISS-PLY multilayer material, for energyefficient cooking due to up to 10x faster & more even heat/cold conductivity compared to pure stainless steel. Universal use in all appliances & on all cooking surfaces. Hygienic, food safe, odorless, antibacterial, stainless & dishwasher safe.







GN-standard	Depth	Liter	Order no.
	mm	L	
GN 1/1	100	10,0	84010801
	65	6,0	84010802
	40	2,5	84010803
325 x 530 mm			



GN-standard	Depth	Liter	Order no.
	mm	L	
GN 2/3	100	7,0	84010805
	65	4,0	84010806
	40	2,0	84010807
325 x 352 mm			



GN-standard	Depth	Liter	Order no.
	mm	L	
GN 1/2	100	5,0	84010809
	65	3,0	84010810
325 x 265 mm	40	1,5	84010811



GN-standard	Depth	Liter	Order no.
	mm	L	
GN 1/3	100	3,0	84010831
	65	2,0	84010841
325 x 176 mm	40	1,0	84010840

All prices in Euro without VAT. for settlement with the specialized trade. Our general delivery and order conditions apply.

Subject to technical and price changes. Valid from 01.04.2022.

GN-cooking-pot thermoplates® nano square - with handles



Optimally portable, with non-stick surface, 2,6 mm SWISS-PLY multi-layer material, for energy-efficient cooking due to up to 10x faster & more even heat/cold conductivity, compared to pure stainless steel. Universal use in all appliances & on all cooking surfaces. Hygienic, food safe, odorless, antibacterial, stainless & dishwasher safe.





Rieber
PATENTED
EP 1 833 341

GN-standard	Depth	Liter	Order no.
	mm	L	
GN 1/1	100	10,0	84010901
	65	6,0	84010902
	40	2,5	84010903
325 x 530 mm			



GN-standard	Depth	Liter	Order no.
	mm	L	
GN 2/3	100	7,0	84010905
	65	4,0	84010906
325 x 352 mm			



GN-standard	Depth	Liter	Order no.
	mm	L	
GN 1/2	100	5,0	84010909
	65	3,0	84010910
325 x 265 mm	40	1,5	84010911



GN-standard	Depth	Liter	Order no.
	mm	L	
GN 1/3	100	3,0	84010946
	65	2,0	84010941
325 x 176 mm	40	1,0	84010940



GN-cooking-pot thermoplates® nano angular - with drop handle

Optimally portable, with non-stick surface, 2,6 mm SWISS-PLY multi-layer material, for energy-efficient cooking due to up to 10x faster & more even heat/cold conductivity, compared to pure stainless steel. Universal use in all appliances & on all cooking surfaces. Hygienic, food safe, odorless, antibacterial, stainless & dishwasher safe.







GN-standard	Depth	Liter	Order no.
	mm	L	
GN 1/1	100	10,0	84011301
325 x 530 mm	65	6,0	84011302



Subject to technical and price changes. Valid from 01.04.2022.

GN-standard	Depth	Liter	Order no.
	mm	L	
GN 1/2	65	3,0	84011308



GN-cooking-pot thermoplates® nano C - rounded corners - without handle



In use on KIPOT®, with non-stick surface, 2,6 mm SWISS-PLY multi-layer material, for energy-efficient cooking due to up to 10x faster & more even heat/cold conductivity, compared to pure stainless steel. Universal use in all appliances & on all cooking surfaces. Hygienic, food safe, odorless, antibacterial, stainless & dishwasher safe.





GN-standard	Depth	Liter	Order no.
	mm	L	
GN 1/1	100	10,0	84010887
	65	6,0	84010888
	40	2,5	84010889
325 x 530 mm			



GN-standard	Depth	Liter	Order no.
	mm	L	
GN 2/3	100	7,0	84010894
	65	4,0	84010895
	40	2,0	84010896
325 x 352 mm			



GN-standard	Depth	Liter	Order no.
	mm	L	
GN 1/2	100	5,0	84010897
	65	3,0	84010898
325 x 265 mm	40	1,5	84010899



GN-standard	Depth	Liter	Order no.
	mm	L	
GN 1/3	100	3,0	84010857
	65	2,0	84010858
325 x 176 mm	40	1,0	84010859



GN-standard	Depth	Liter	Order no.
	mm	L	
GN 1/6	100	1,2	84010856
	65	0,7	84010855
162 x 176 mm			



thermoplates®eco SWISS | PLY - with drop handle

The stackable & patented cooking container in GN-size made of conductive SWISS-PLY multilayer material - for energy-saving preparation (up to 20 % kWh savings), through very fast & even heat/cold distribution. Can also be used with direct contact heat (gas, ceramic, induction, electric) for universal cooking. Throughout the process in and on all kitchen appliances, without spilling over when preparing, chilling, regenerating, keeping warm. With robust & scratch-resistant nano surface for adherence and high-quality stacking shoulder for easy unstacking.







Subject to technical and price changes. Valid from 01.04.2022.

GN-standard	Depth	Liter	Order no.
	mm	L	
GN 1/1	100	10,0	84010819
325 x 530 mm	65	6,0	84010818



GN-cooking-pot thermoplates® coated angular - without handles



Non-stick, 2,6 mm SWISS-PLY multi-layer material, for energy-efficient cooking due to up to 10x faster & more even heat/cold conductivity, compared to pure stainless steel. Universal use in all appliances & on all cooking surfaces, except gas. Hygienic, food safe, odorless, antibacterial, stainless & dishwasher safe.





GN-standard	Depth	Liter	Order no.
	mm	L	
GN 1/1	100	10,0	84010820
	65	6,0	84010821
	40	2,5	84010822
325 x 530 mm			
	I	I	
GN-standard	Depth	Liter	Order no.
	mm	L	
GN 2/3	100	7,0	84010824
	65	4,0	84010825
	4.0	0.0	0.4040000
	40	2,0	84010826
	40	2,0	84010826
325 x 352 mm	40	2,0	84010826
325 x 352 mm GN-standard	Depth	Liter	0rder no.

GN-standard	Depth	Liter	Order no.
	mm	L	
GN 1/2	100	5,0	84010828
	65	3,0	84010829
325 x 265 mm	40	1,5	84010830
020 A 200 IIIIII			



GN-standard	Depth	Liter	Order no.
	mm	L	
GN 1/3	100	3,0	84010845
	65	2,0	84010844
325 x 176 mm	40	1,0	84010843



GN-cooking-pot thermoplates® coated angular - with handles

Optimally portable & non-stick, 2,6 mm SWISS-PLY multi-layer material, for energy-efficient cooking due to up to 10x faster & more even heat/cold conductivity, vs. stainless steel. Universal use in all appliances & on all cooking surfaces, except gas. Hygienic, food safe, odorless, antibacterial, stainless & dishwasher safe.







GN-standard	Depth	Liter	Order no.
	mm	L	
GN 1/1	100	10,0	84010920
	65	6,0	84010921
	40	2,5	84010922
325 x 530 mm			




GN-standard	Depth	Liter	Order no.
	mm	L	
GN 2/3	100	7,0	84010924
	65	4,0	84010925
325 x 352 mm	40	2,0	84010926
020 A 002 IIIIII			



GN-standard	Depth	Liter	Oraer no.
	mm	L	
GN 1/2	100	5,0	84010928
	65	3,0	84010929
	40	1,5	84010930
325 x 265 mm			



GN-standard	Depth	Liter	Order no.
	mm	L	
GN 1/3	100	3,0	84010945
	65	2,0	84010944
	40	1,0	84010943
325 x 176 mm			

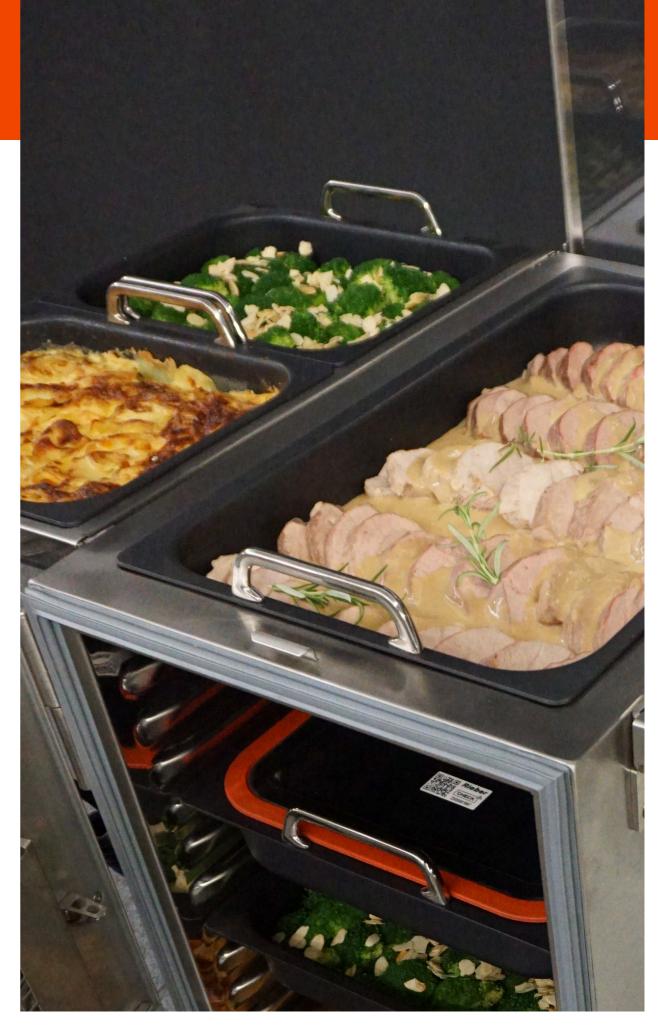

All prices in Euro without VAT. for settlement with the specialized trade. Our general delivery and order conditions apply. Subject to technical and price changes. Valid from 01.04.2022.

GN-cooking-pot thermoplates® coated C - rounded corners - without handles

In use on K|POT®, non-stick, 2,6 mm SWISS-PLY multi-layer material, for energy-efficient cooking due to up to 10x faster & more even heat/cold conductivity, compared to stainless steel. Universal use in all appliances & on all cooking surfaces, except gas. Hygienic, food safe, odorless, antibacterial, stainless & dishwasher safe.







GN-standard	Depth	Liter	Order no.
	mm	L	
GN 1/1	100	10,0	84010860
	65	6,0	84010861
	40	2,5	84010862
325 x 530 mm			



GN-standard	Depth	Liter	Order no.
	mm	L	
GN 2/3	100	7,0	84010865
	65	4,0	84010866
325 x 352 mm	40	2,0	84010867



GN-Standard	Бериі	Liter	Order no.
	mm	L	
GN 1/2	100	5,0	84010870
	65	3,0	84010871
	40	1,5	84010872
325 x 265 mm			



GN-standard	Depth	Liter	Order no.
	mm	L	
GN 1/3	100	3,0	84010847
	65	2,0	84010846
	40	1,0	84010848
325 x 176 mm			

GN-standard	Depth	Liter	Order no.
	mm	L	
GN 1/6	100	1,2	84010875
	65	0,7	84010874
162 x 176 mm			





GN-cooking-pot thermoplates® nano teppanyaki plate - without handles

With non-stick surface, 4,00 mm SWISS-PLY multi-layer material, for pinpoint grilling results on all cooking zones. Energy-efficient preparation due to up to 10x faster & more even heat/cold conductivity, compared to pure stainless steel. Hygienic, food safe, odorless, antibacterial, stainless & dishwasher








GN-standard	Depth	Liter	Order no.
	mm	L	
GN 1/1	20	-	84010836
325 x 530 mm			
GN-standard	Depth	Liter	Order no.
	mm	L	



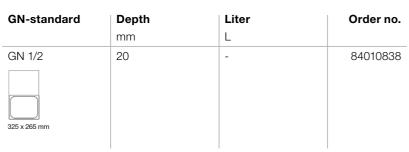



GN-cooking-pot thermoplates® nano teppanyaki plate - with handles

stainless & dishwasher safe.

325 x 530 mm









GN-standard	Depth	Liter	Order no.
	mm	L	
GN 1/1	20	-	84010935



	mm	L	
GN 2/3	20	-	84010936



GN-standard	Depth	Liter	Order no.
	mm	L	
GN 1/2	20	-	84010937
325 x 265 mm			





All prices in Euro without VAT. for settlement with the specialized trade. Our general delivery and order conditions apply. Subject to technical and price changes. Valid from 01.04.2022.

GN-cooking-pot thermoplates® coated teppanyaki plate – without handles



Non-stick coated, 4,00 mm SWISS-PLY multi-layer material, for pinpoint grilling results on all cooking surfaces, except gas. Energy efficient cooking due to up to 10x faster & more even heat/cold conductivity, compared to pure stainless steel. Hygienic, food safe, odorless, antibacterial, stainless & dishwasher safe





GN-standard	Depth	Liter	Order no.
	mm	L	
GN 1/1	20	-	84010832
325 x 530 mm			
GN-standard	Depth	Liter	Order no.
	mm	L	
GN 2/3	20	-	84010833
325 x 352 mm			
GN-standard	Depth	Liter	Order no.
	mm	L	
GN 1/2	20	-	84010834



e in Germany

All prices in Euro without VAT. for settlement with the specialized trade. Our general delivery and order conditions apply. Subject to technical and price changes. Valid from 01.04.2022.

GN-cooking-pot thermoplates® coated teppanyaki plate – with handles



Optimally portable & non-stick, 4,00 mm SWISS-PLY multi-layer material, for pinpoint grilling results on all cooking surfaces, except gas. Energy efficient cooking due to up to 10x faster & more even heat/cold conductivity, compared to pure stainless steel. Hygienic, food safe, odorless, antibacterial, stainless & dishwasher safe.





GN-standard	Depth mm	Liter ∟	Order no.
GN 1/1	20	-	84010932
325 x 530 mm			

GN-standard	Depth	Liter	Order no.
	mm	L	
GN 2/3	20	-	84010933
325 x 352 mm			



GN-standard	Depth	Liter	Order no.
	mm	L	
GN 1/2	20	-	84010934
325 x 265 mm			





All prices in Euro without VAT. for settlement with the specialized trade. Our general delivery and order conditions apply. Subject to technical and price changes. Valid from 01.04.2022.

GN-cooking-pot thermoplates® C Buffet assortment accessories

Matching accessories for the corresponding thermoplates® GN sizes, such as the practical stainless steel handles, for safe carrying of all hot thermoplates® without handles, as well as trivets with heat protection for direct serving on the table. Also the matching stainless steel cooling & heating pellets, for placing /transporting the thermoplates® for passive cold & warm keeping.





Handle 1/1 - f. thermoplates®



GN-standard	Weight	Order no.
	kg	
GN 1/1	0,7	84190405

Handle 2/3 - f. thermoplates®



GN-standard Weight		Order no.
	kg	
GN 2/3	0,5	84190402

Handle 1/3 - f. thermoplates®



GN-standard	Weight	Order no.
	kg	
GN 1/3	0,4	84190404

Handle 1/2 - f. thermoplates®



GN-standard	Weight	Order no.
	kg	
GN 1/2	0,5	84190403

GN-cooling-pellet CNS 1/2 - 12,5 mm



GN-standard	Weight	Order no.
	kg	
GN 1/2	1,6	85012012

Heat-pellet-CNS GN 1/2 - asymmetrical



GN-standard	Weight	Order no.
	kg	
GN 1/2	1,4	89080171



All prices in Euro without VAT. for settlement with the specialized trade. Our general delivery and order conditions apply. Subject to technical and price changes. Valid from 01.04.2022.

GN-COVER thermoplates® Program at a glance



CONTAINER TRACKING

Easy to retrofit QR code sticker for all GN containers. Enables sustainable & digital organization via **eatTAINABLE reusable system** and tracking of GN containers to customer and facility. Robustly usable in commercial kitchens as dishwasher safe, food certified & temperature resistant from -40 °C to +180 °C.



THERMOPLATES® COVER-VARIANTS

OUR NO.1





Stainless steel watertight plug-in cover

Reliable for all liquid foods such as soups and sauces. For safe transport, storage, cooking and regeneration. Absolutely tightly sealed, up to +180 °C even in the combi steamer applicable.

Available in GN-sizes 1/1, 2/3, 1/2, 1/3, 1/4, 2/8, 1/6, 1/9.*/**

© FOR 100 % SLOSH-PROOF TRANSPORT With heat-resistant, food-safe sealing lip






For sustainable vacuuming & sous vide cooking without disposable plastic bags directly in the GN-container. In combination with vacuumable stainless steel GN-containers, optimal for storage & transport. For longer shelf life and freshness of food. With absolutely spill-proof sealing lip, up to +180 °C.

Available in GN-sizes GN 1/2, 1/3 and 1/6.

6 FOR PROFESSIONAL VACUUM PUMPS

can be used with hand/chamber/hose pump

GN-plug-i-cover made of stainless steel




Available with/without handle cut-out, in GN_sizes 1/1, 2/3, 1/2, 1/3, 1/4, 2/8, 1/6, 1/9.*

OPTIMAL FOR SOLID & VISCOUS FOODS

like potatoes, porridge, pasta or rice

GN-plug-in-cover made of stainless steel



Available with/without handle cut-out, in GN-sizes 1/1, 2/3, 1/2, 1/3, 1/4, 2/8, 1/6, 1/9.*

IDEAL FOR COLD DISHES

such as salads, vegetables and fruit




** 1/9 cover does not fit 1/9 containers with drop handle

*** GN 1/3 without automatic lowering function

THERMOPLATES® COVER-VARIANTS

Stainless steel buffet cover




Available in GN-sizes 1/1, 2/3, 1/2, 1/3.***

• FOR SELF-SERVICE & SERVING

and for the regeneration & presentation of hot and cold dishes

Buffet cover made of plastic (Tritan)



Available in GN-sizes 1/1, 2/3, 1/2, 1/3.***

• FOR SELF-SERVICE & SERVING

and for presenting cold food


Stainless steel cooking cover

For easy and safe handling, with central fixed handle, for cooking, simmering and presenting food.

Available with/without handle recess and in GN-sizes 1/1, 2/3, 1/2, 1/3,

EXACT FIT ON THERMOPLATES®

with round/cornered corners, as well as GN-containers

















RETROFIT NOW!

GN-cooking-cover made of stainless steel - with fixed handle

The cooking GN-cover made of stainless steel, optimal in handling, centered with firm handle and rounded corners. Flexible use for preparing food, optimally suitable in use with cooking container thermoplates® C on the K|POT®.









version	GN-standard	Order no.
with cutouts	GN 1/1	84012135
	GN 1/2	84012137
	GN 1/3	84012138
	GN 2/3	84012136



Version	GN-standard	Order no.
no cutouts	GN 1/1	84012131
	GN 1/2	84012133
	GN 1/3	84012134
	GN 2/3	84012132





All prices in Euro without VAT. for settlement with the specialized trade. Our general delivery and order conditions apply. Subject to technical and price changes. Valid from 01.04.2022.

Subject to technical and price changes. Valid from 01.04.2022.

GN-buffet-cover made of stainless steel – with automatic lowering function



84012115

The serving GN-cover made of stainless steel, for hygienic protection of hot/cold food in GN-thermoplates® – with automatic lowering function for optimal handling at the buffet – perfectly suitable in application with cooking container thermoplates® C on the K|POT®.

GN 1/2

325 x 265 mm



More info

GN-standard Order no. GN 1/1 GN 1/1 GN-standard Order no. GN 2/3 GN 2/3 B4012113 GN-standard Order no. GN-standard Order no.



All prices in Euro without VAT. for settlement with the specialized trade. Our general delivery and order conditions apply. Subject to technical and price changes. Valid from 01.04.2022.

GN-buffet-cover made of polycarbonate – with automatic lowering function



The transparent serving GN-cover made of polycabonate, for hygienic protection & presentation of cold foods in GN-thermoplates® – with automatic lowering function for optimal handling at the buffet - perfectly suitable in application with thermoplates® C on the K|POT® cool/passive.



More inf

GN-standard	Order no.	
GN 1/1	84012112	
GN-standard	Order no.	
GN 2/3	84012114	
GN-standard	Order no.	
GN 1/2	84012116	



All prices in Euro without VAT. for settlement with the specialized trade. Our general delivery and order conditions apply. Subject to technical and price changes. Valid from 01.04.2022.

THERMOPORT® PREMIUM STAINLESS STEEL

The Rieber benefits.

Bedienung

K|POT®





Tightly welded interior with special seamless deep-drawn support beads (prevent tipping when pulling out the GN-containers) in hygienic design H3, without dirt joints & absolutely hygienic.



OPERATION.

EASY UNHINGEABLE DOOR & CLEANING

The pivot hinge allows flexible exchange of door variants (heated/unheated). The removable heating element allows thorough cleaning of the interior.



DOOR SEAL

The circumferential & food resistant door seal can be easily removed for thorough and quick cleaning.



TEMPERATURE SENSOR

CHECK temperature sensor transmitting automatically on the outside of the door with real-time documentation (retrofittable).



COMBINABILITY

You can combine and stack our stainless steel & plastic thermoport® models – as a fully flexible and mobile transport system.



BUMP CORNERS & ROLLERS

4-sided bumper corners for perfect impact protection as well as robust castor equipment with lockable rollers.



SERVICE TEMPERATURE CHECK & CORE TEMPERATURE MEASUREMENT

The thermoport® top- & front-loading models with dispensing option can be used directly for serving from the GN-system. Manual temperature measurement by means of bluetooth-capable core temperature sensor.



STACKING EMBOSSING

Cover with high-quality stacking embossing, for non-slip placement of other stainless steel & plastic thermoport® models.



HYGIENIC COOLING

Our statically cooled thermoport® models have cooling meanders in the side walls and are therefore absolutely hygienic, as no germination is possible in the interior.



68 69

thermoport® premium stainless steel Program at a glance




DIGITAL HACCP DOCUMENTATION

Paperless & retrofittable at any time, throughout the entire process (goods receiving, cooling/storage, production, transport & output)



connected by **CHECK CLOU**E

thermoport® STAINLESS STEEL VARIANTS



Toploader heated - Size: 100

For transporting & actively keeping food warm in the GN-system, as well as for direct ladling via removable cover. With self-regulating silicone heating, exclusively wet heatable. Double-walled & tightly welded, excellent insulation & highest hygiene. Heating capacity max. +95 °C.

Capacity max.* for size 1000: 26L



applicable via removable cover

Frontloader neutral - Sizes: 1000 | 1400 | 1600 | 2000 | 3000

For transporting & passive hot/cold holding of food in GN-system, for insertion on the seamless deep-drawn support beads. Double-walled & tightly welded, excellent insulation & highest hygiene.

Capacity max.* for size 1000: 38L | 1400: 63,7L | 1600: 70,4L | 2000: 89,7L | 3000: 130L

RELIABLE COLD & WARM HOLDING WITH GN-COOLING & -HEATING PELLETS for size 1400: 2 swivel castors & 2 swivel stop castors



For transporting & actively keeping food warm in the GN-system, for insertion on the seamless deep-drawn support ledges. Double-walled & tightly welded, excellent insulation & highest hygiene.

Capacity max.* for size 1000: 38L | 1400: 63,7L | 1600: 70,4L | 2000: 89,7L | 3000: 130L

PRECISE TO THE DEGREE & POWERFUL DIGITAL CONVECTION HEATING. UP TO MAX. +100 °C

for size 1400: 2 swivel castors & 2 swivel stop castors

hybrid kitchen - Models: 140 °C with cover | 200 °C

For transporting, regenerating & active keeping warm, removable cover (only for 140 °C model) for direct serving function of food in GN system, for sliding onto the seamless deep-drawn support beads. Double-walled & tightly welded, excellent insulation & highest hygiene. Up to max. +140 °C resp. 200 °.

Max. capacity*: 70.4L

HYBRID DOOR WITH 2 SEPARATELY CONTROLLABLE DIGITAL CIRCULATING AIR HEATERS & FANS

for various preparation programs

OPTIMAL MOBILITY WITH 2 FIXED & 2 SWIVEL CASTERS + 4 BUMPER CORNERS

*with GN-containers/thermoplates®

WITH STORABLE AUTOMATIC PROGRAMMES 100 % SAFE TO OPERATE & SUCCESS GUARANTEE | MOBILE USABLE EVERYWHERE



⊕ No heavy current (since 230V), structural measures, extractor hood, water connections, etc. required



thermoport® STAINLESS STEEL VARIANTS

Frontloader convection heated with cover - Models: 1000-D | 1600-D

With removable cover for transporting, active keeping warm & direct serving of food in GN-system, for sliding on the seamless deep-drawn support beads. Double-walled & tightly welded, excellent insulation & highest hygiene.

Capacity max.* for size 1000-D: 52L | 1600-D: 70,4L

DEGREE-ACCURATE & POWERFUL DIGITAL CONVECTION HEATING. UP TO MAX. +100 °C

Frontloader cooled - Sizes: 1000 | 1600 | 2000 | 3000

For transport & active cooling of food in GN-Sytsem, to be inserted on the seamless deep drawn support beads. Double-walled & tightly welded, excellent insulation & highest hygiene. Cooling range +5 to +8 °C model 1000 or +2 to +8 °C model 1600 to 3000.

Capacity max.* for size 1000: 38L | 1600: 70,4L | 2000: 89,7L | 3000: 130L

DIGITAL CONTROLLABLE REFRIGERATION MACHINE

+ static cooling via door fan for constant cold distribution (model 1600 to 3000), refrigerant R290

Frontloader hybrid - Models: 3000 hot active / cold passive | 3000 hot active / cold active

With two separate temperature ranges, for transporting, active keeping warm & passive or active cooling of food in GN-system, for insertion on the seamless deep-drawn support beads. Doublewalled & tightly welded, excellent insulation & highest hygiene. Static cooling, refrigerant R290.

Capacity max.* for size 3000: 70 L (hot area) & 44 liters (cold area)

BAOVE DEGREE-ACCURATE & EFFICIENT DIGITAL CIRCULATING AIR HEATING UP TO MAX. +100 °C

Bottom passive cooling by means of cooling pellet or digitally controllable cooling machine (+2 °C to +8 °C)

thermoport® canteen - Models: neutral door | door 100 °C | door 200 °C

Can be used as a complete mobile canteen, transport & serving combined in one trolley. Serving function via laterally fold-out GN holding frames, as well as fold-out hygienic protection slides. Doublewalled and tightly welded, with 16 seamless deep-drawn bead pairs, interior hygienic design H2.

Capacity max.*: 70L

AVAILABLE WITH HYBRID DOOR

digital convection heating, up to max. +140 °C & with neutral door as well as door with convection heating up to max. +100 °C





thermoport® stainless steel Frontloader portable – unheated



Unheated food transport box with insulated door, interior hygienic design H3. Hygienic double-walled & tightly welded. For insertion of GN-containers/thermoplates® with watertight plug-in cover, for reliable & insulated food transport. All thermoport® models, plastic & stainless steel are stackable in combination.



More info

thermoport® CNS 1000 unheated

Support distance: 36 mm | Ambient temperature: -20°C to +100°C



Dimension	Capacity	Weight	Support beads	Order no.
mm	max. L	kg		
410 x 665 x	38	19,0	8	85010404
470				



All prices in Euro without VAT. for settlement with the specialized trade. Our general delivery and order conditions apply. Subject to technical and price changes. Valid from 01.04.2022.

thermoport® stainless steel Toploader portable – heated



Heated food transport box with insulated cover, self-regulating silicone foil heating fix +86°C max. +95°C, only wet heatable. Hygienic double-walled & tightly welded. For stacking GN-containers/thermoplates® with watertight plug-in covers, for reliable & insulated food transport. All thermoport® models can be stacked in combination with each other. Rated voltage 1N AC 230V 50/60Hz



More info

thermoport® CNS 105 heated

Connected load: 500 W | Plug type: Schuko plug (type F) | Cable type: smooth cable Cable length: 200 mm | Ambient temperature: -20°C to +100°C



Dimension	Capacity	Weight	Order no.
mm	max. L	kg	
600 x 400 x 306	26	13,2	85010302



All prices in Euro without VAT. for settlement with the specialized trade. Our general delivery and order conditions apply. Subject to technical and price changes. Valid from 01.04.2022.

thermoport® stainless steel Frontloader portable - convection heated

Circulating air heated food transport box with insulated door, digitally adjustable circulating air heating max. +90°C. Interior hygienic design H3. Hygienic double-walled & tightly welded. For insertion of GN-containers/thermoplates® with watertight plug-in cover. All thermoport® plastic & stainless steel can be stacked together. Rated voltage 1N AC 230V 50/60Hz.





thermoport[®] CNS 1000 convection heated

Connected load: 810 W | Plug type: Schuko plug (type F) | Cable type: Spiral cable Cable length: 1,500 mm | Protection class: IPX5 | Support distance: 36 mm Ambient temperature: -20°C to +100°C

Dimension	Capacity	Weight	Support beads	Order no.
mm	max. L	kg		
410 x 655 x	38	23,0	8	85010405
470				

thermoport® CNS 1000-D convection heated

Connected load: 810 W | Plug type: Schuko plug (type F) | Cable type: Spiral cable Cable length: 1,500 mm | Protection class: IPX3 | Support distance: 55 mm Ambient temperature: -20°C to +100°C

Dimension	Capacity	Weight	Support beads	Order no.
mm	max. L	kg		
410 x 645 x	52	30,0	7	85010503
530				



thermoport® stainless steel Frontloader mobile - unheated

Unheated food transport trolleys with insulated door, interior hygienic design H3. Hygienic double-walled & tightly welded. For insertion of GN-containers/ thermoplates® with watertight plug-in cover, for reliable & insulated food transport. All thermoport® models, plastic & stainless steel are stackable in



thermoport® CNS 1400 unheated

Protected against water jets | Support distance: 37 mm | Ambient temperature: -20°C to +100°C | 2 swivel castors; 2 swivel stop castors | Castor Ø: 75 mm | Max. Max. load: 75 kg 4 bumper corners



Dimension	Capacity	Weight	Support beads	Order no.
mm	max. L	kg		
492 x 769 x	64	33,0	14	85011101
793				

thermoport® CNS 1600 unheated

Water jet protected | Support distance: 37 mm | Ambient temperature: -20°C to +100°C 2 fixed castors; 2 swivel casters | Castor Ø: 125 mm | Max. Max. load: 150 kg | 4 shock corners



Dimension	Capacity	Weight	Support beads	Order no.
mm	max. L	kg		
492 x 769 x	70	36,2	16	85010608
930				

thermoport® CNS 2000 unheated

Water jet protected | Support distance: 37 mm | Ambient temperature: -20°C to +100°C | 2 fixed castors; 2 swivel casters | Castor Ø: 125 mm | Max. Max. load: 150 kg | 4 shock corners



Dimension	Capacity	Weight	Support beads	Order no.
mm	max. L	kg		
492 x 769 x	90	41,2	20	85010707
1078				

thermoport® CNS 3000 unheated

Water jet protected | Support distance: 37 mm | Ambient temperature: -20°C to +100°C 2 fixed castors; 2 swivel casters | Castor Ø: 125 mm | Max. Max. load: 150 kg | 4 shock corners



Abmessung	Capacity	Weight	Support beads	Order no.
mm	max. L	kg		
592 x 769 x	130	60,0	30	85010807
1448				



thermoport® stainless steel Frontloader mobile

- convection heated

Circulating air heated food transport box with insulated door, digitally adjustable circulating air heating max. +100°C. Interior hygienic design H3. Hygienic double-walled & tightly welded. For insertion of GN-containers/thermoplates® with watertight plug-in cover. All thermoport® plastic & stainless steel can be stacked together. Rated voltage 1N AC 230V 50/60Hz.







thermoport[®] CNS 1400 convection heated

Heating range: max. +95 °C | Connected load: 765 W | Plug type: Schuko plug (type F) Cable type: Spiral cable | Cable length: 1,500 mm | Protection class: IPX5 | Suitable for water jets (when heating element is removed) | Support distance: 37 mm | Ambient temperature: -20°C to +100°C | 2 swivel castors; 2 swivel stop castors | Castor Ø: 75 mm | Max. max. load: 75 kg | 4 bumper corners

Dimension	Capacity	Weight	Support beads	Order no.
mm	max. L	kg		
492 x 769 x	64	36,4	14	85011102
793				



thermoport® CNS 1600 convection heated

Heating range: max. +95 °C | Connected load: 763 W | Plug type: Schuko plug (type F) Cable type: Spiral cable | Cable length: 1,500 mm | Protection class: IPX5 | Suitable for water jets (when heating element is removed) | Support distance: 37 mm | Ambient temperature: -20°C to +100°C | 2 fixed castors; 2 swivel castors | Castor Ø: 125 mm | Max. load capacity: 150 kg | 4 bumper corners

Dimension	Capacity	Weight	Support beads	Order no.
mm	max. L	kg		
492 x 769 x	70	45,0	16	85010609
930				



thermoport® CNS 1600-D convection heated

Heating range: max. +95 °C | Connected load: 763 W | Plug type: Schuko plug (type F) Cable type: smooth cable | Cable length: 1,500 mm | Protection class: IPX5 | Suitable for water jets (when heating element is removed) | Support distance: 37 mm | Ambient temperature: -20°C to +100°C | 2 fixed castors; 2 swivel castors | Castor Ø: 125 mm | Max. load capacity: 150 kg | 4 bumper corners

Dimension	Capacity	Weight	Support beads	Order no.
mm	max. L	kg		
492 x 769 x	78	40,4	16	85010903
963				



Heating range: max. +95 °C | Connected load: 763 W | Plug type: Schuko plug (type F) Cable type: Spiral cable | Cable length: 1,500 mm | Protection class: IPX5 | Suitable for water jets (when heating element is removed) | Support distance: 37 mm | Ambient temperature: -20°C to +100°C | 2 fixed castors; 2 swivel castors | Castor Ø: 125 mm | Max. load capacity: 150 kg | 4 bumper corners



Dimension	Capacity	Weight	Support beads	Order no.
mm	max. L	kg		
492 x 769 x	90	44,0	20	85010708
1078				

thermoport® CNS 3000 convection heated

Heating range: max. +95 °C | Connected load: 763 W | Plug type: Schuko plug (type F) Cable type: Spiral cable | Cable length: 1,500 mm | Protection class: IPX5 | Suitable for water jets (when heating element is removed) | Support distance: 37 mm | Ambient temperature: -20°C to +100°C | 2 fixed castors; 2 swivel castors | Castor Ø: 125 mm | Max. load capacity: 150 kg | 4 bumper corners



Dimension	Capacity	Weight	Support beads	Order no.
mm	max. L	kg		
592 x 769 x	130	63,0	30	85010808
1448				



All prices in Euro without VAT. for settlement with the specialized trade. Our general delivery and order conditions apply. Subject to technical and price changes. Valid from 01.04.2022.

thermoport® stainless steel Frontloader mobile – cooled

Refrigerated food transport cart with insulated door and digital controllable refrigeration machine, interior hygienic design H3. Double-walled & tightly welded. For insertion of GN-containers/thermoplates® with watertight plug-in cover. Thermoport® plastic & stainless steel can be stacked together. Rated voltage 1N AC 230V 50/60Hz.









thermoport® CNS 1000 cooled R290

Cooling range: $+2^{\circ}$ C to $+8^{\circ}$ C | Coolant: R290 | Weight: 45 kg | Plug type: Schuko plug (type F) Cable type: Spiral cable | Cable length: 2,000 mm | Protection class: IPX3 | Hygienic design: H3 | Splash-proof | Support distance: 36 mm | 4 swivel castors | Castor Ø: 75 mm | Max. load capacity: 75 kg | 4 bumper corners

Dimension	Capacity	Support beads	Connected load	Order no.
mm	max. L		W	
492 x 769 x 770	38	8	250	85010411



thermoport® CNS 1600 cooled R290

Cooling range: +2°C to +8°C | Coolant: R290 | Weight: 50 kg | Plug type: Schuko plug (type F) Cable type: Spiral cable | Cable length: 2,000 mm | Protection class: IPX3 | Hygienic design: H3 Splash-proof | Support distance: 37 mm | 2 fixed castors; 2 swivel castors | Castor Ø: 125 mm Max. load: 62 kg | 4 shock corners max. load: 62 kg | 4 bumper corners

Dimension	Capacity	Support beads	Connected load	Order no.
mm	max. L		W	
492 x 769 x 1130	70	16	265	85010616



thermoport® CNS 2000 cooled R290

Cooling range: +2°C to +8°C | Coolant: R290 | Weight: 80 kg | Plug type: Schuko plug (type F) Cable type: Spiral cable | Cable length: 2,000 mm | Protection class: IPX3 | Hygienic design: H3 Splash-proof | Support distance: 37 mm | 2 fixed castors; 2 swivel castors | Castor Ø: 125 mm Max. load capacity: | 4 shock corners

Dimension	Capacity	Support beads	Connected load	Order no.
mm	max. L		W	
492 x 769 x 1276	90	20	265	85010718




thermoport® CNS 3000 cooled R290

Cooling range: +2°C to +8°C | Coolant: R290 | Weight: 100 kg | Plug type: Schuko plug (type F) | Cable type: Spiral cable | Cable length: 2,000 mm | Protection class: IPX3 | Hygienic design: H3 | Splash-proof | Support distance: 37 mm | 2 fixed castors; 2 swivel casters | Castor Ø: 125 mm | Max. load capacity: | 4 shock corners

Dimension	Capacity	Support beads	Connected load	Order no.
mm	max. L		W	
492 x 769 x 1646	130	30	265	85010820



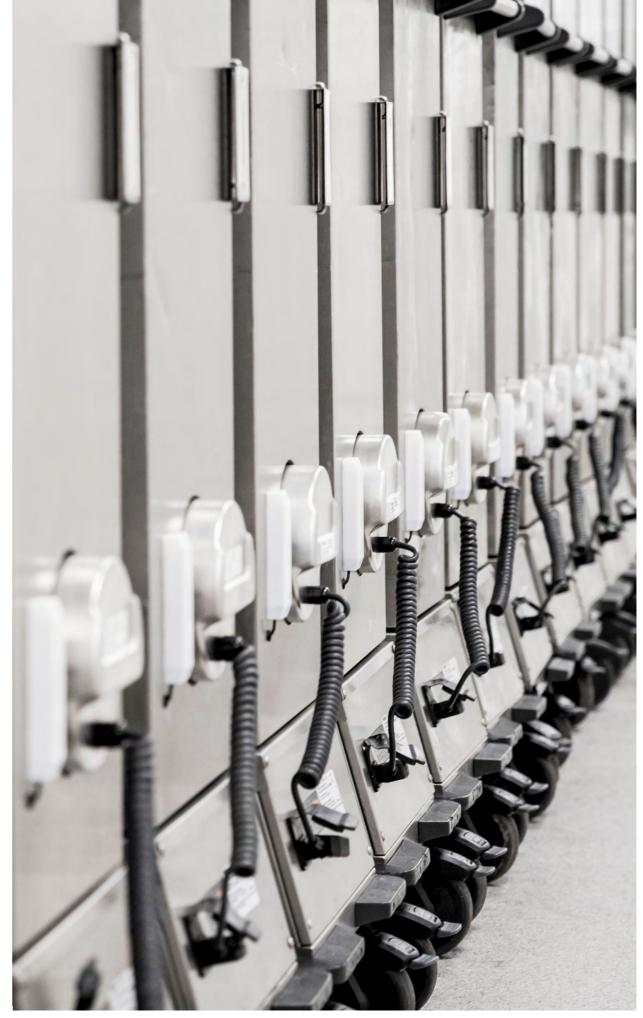

All prices in Euro without VAT. for settlement with the specialized trade. Our general delivery and order conditions apply. Subject to technical and price changes. Valid from 01.04.2022.

thermoport® stainless steel Frontloader mobile - hybrid

Hybrid food transport trolley with 2 insulated compartments, digital convection heating on top, cooling compartment (active/passive) on bottom. Interior hygienic design H3. Hygienic double-walled & tightly welded. For insertion of GN-containers/thermoplates® with watertight plug-in cover. Thermoport® plastic & stainless steel can be stacked together. Rated voltage 1N AC 230V





thermoport® CNS 3000 hybrid ak-W & pa-K

Connected load: 763 W | Plug type: Schuko plug (type F) | Cable type: smooth cable Cable length: 1,500 mm | Protection class: IPX4 | Hygienic design: H3 | Suitable for water jets (when heating element is removed) | Support distance: 37 mm | Ambient temperature: +2°C to +100°C | 2 fixed castors; 2 swivel castors | Castor Ø: 125 mm | Max. load capacity: 150 kg


Dimension	Capacity	Weight	Support beads	Order no.
mm	max. L	kg		
492 x 769 x	114	66,0	16 (warm), 8	85010816
1448			(neutral)	



thermoport® CNS 3000 hybrid ak-W & ak-K

Connected load: 950 W | Plug type: Schuko plug (type F) | Cable type: smooth cable Cable length: 1,500 mm | Protection class: IPX4 | Hygienic design: H3 | Suitable for water jets (when heating element is removed) | Support distance: 37 mm | Ambient temperature: +2°C to +100°C | 2 fixed castors; 2 swivel castors | Castor Ø: 125 mm | Max. load capacity: 150 kg 4 bumper corners

Dimension	Capacity	Weight	Support beads	Order no.
mm	max. L	kg		
492 x 769 x	114	78,0	16 (warm), 8	85010817
1648			(kalt)	

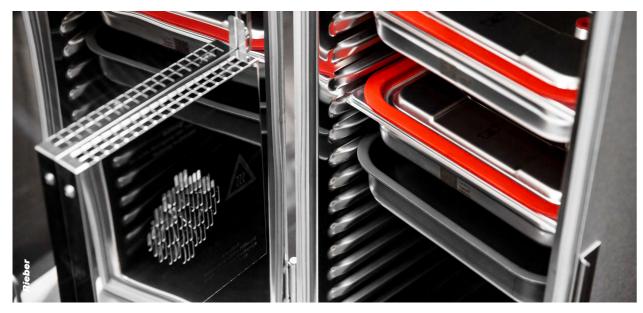

thermoport® stainless steel **Accessories**

Matching accessories for all thermoport® stainless steel models – such as slide-in frames for various smaller GN-container sizes, stainless steel GNcooling or heating pellets for passive cold / warm holding, up to the transport protection with all-round gallery so that further thermoport® models can be stacked without slipping or the chassis for portable stainless steel thermoport® models. Can also be extended with all-round impact protection for robust protection.



Chassis – thermoport® stainless steel

Weight	Order no.
kg	
7,7	88140107

Slide-in frame - 1/6, 1/9

Weight	Order no.
kg	
0,7	85012010

Slide-in frame – 1/4, 1/6, 2/4

Weight	Order no.
kg	
0,5	85012009

GN-Cooling-pellet CNS 1/1 - 12,5 mm

Weight	Order no.
kg	
3,2	85012015

GN-Cooling-pellet CNS 1/1 - 30 mm

Weight	Order no.
kg	
5,6	85012002



Heat pellet CNS GN 1/1

Weight	Order no.
kg	
2,9	89080172



Transport lock – thermoport® CNS



Veight	Order no.
rg	
	85012053

Gallery with closure bracket




Weight	Order no.
kg	
1,8	85100202


Shock protection all around - TH 1400, 1600, 2000

Weight	Order no.
kg	
2,2	85012055

Shock protection all around – thermoport®3000

Weight	Order no.
kg	
2,3	85012054

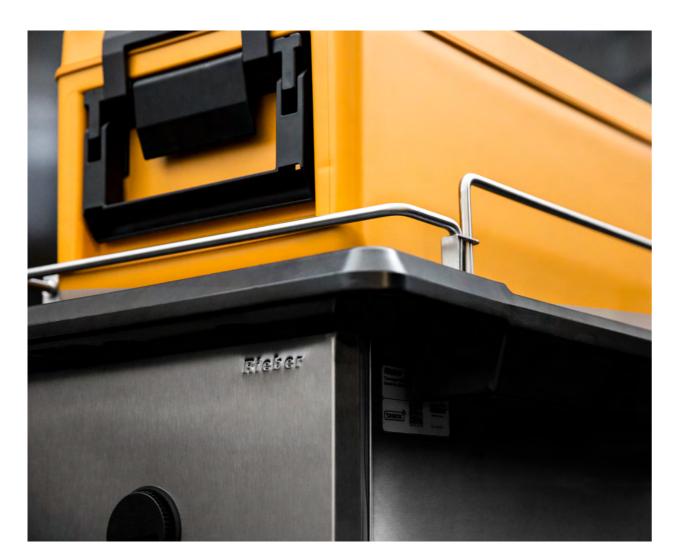

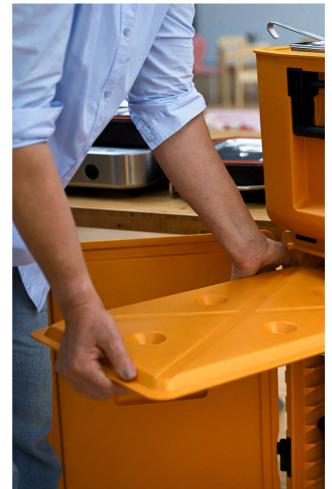







All prices in Euro without VAT. for settlement with the specialized trade. Our general delivery and order conditions apply. Subject to technical and price changes. Valid from 01.04.2022.

THERMOPORT® LIGHT PLASTIC

The Rieber benefits.





EASILY REMOVABLE DOOR

The pivot hinge allows the door variants (heated/unheated) to be flexibly interchanged.



CLEANING

Easily dishwasher-safe (up to +90 °C) due to the removable heating elements or the cooling element. For easy and hygienic cleaning.



CHECK ROOM TEMPERATURE SENSOR

In the inside of the door (Frontloader) / in the cover (Toploader) automatically transmitting CHECK room temperature sensor for real-time documentation, easy to retrofit.



COMBINABILITY

You can combine and stack our stainless steel & plastic thermoport® models – as a fully flexible and mobile transport system.



DOUBLE-WALLED INSULATION

Double-wall insulation reliably maintains temperature over long transport distances, even when fully loaded. Inner and outer containers are tightly welded and insulated with CFC-free PU foam.



SCOOP OUTPUT & CHECK CORE TEMPERATURE MEASUREMENT

Portable toploader models can be used directly as output for scooping. Manual temperature measurement by means of bluetooth core temperature sensor.



STACKING CORNERS

Top with sturdy and replaceable stacking corners, for non-slip placement of other stainless steel & plastic thermoport® models.



HYGIENIC COOLING

With our statically cooled thermoport®, the light yet powerful cooling is located on the back. Quick & easy to remove and therefore dishwasher safe (without cooling).



thermoport® light plastics

Program at a glance



DIGITAL HACCP DOCUMENTATION

Paperless & retrofittable at any time, throughout the entire process (goods receiving, cooling/storage, production, transport & output)



thermoport® PLASTIC VARIANTS



Toploader neutral - Sizes: 50 | 100 (with/without cooling pellet cover) - orange | black

For transporting & passively keeping food hot/cold in the GN-system, as well as for direct ladling via removable cover. Sturdy, lightweight and non-porous plastic. Reliably insulated, double-walled & tightly welded. Dishwasher safe up to +90 °C.

Capacity max.* for size 50: 11, 7L | 100: 26L

♠ ALSO AVAILABLE WITH INTEGRATED GN 1/1 COOLING PELLET IN THE COVER for reliable passive cold holding



For transporting & actively keeping food warm in GN-system, as well as for direct ladling via removable cover. Sturdy, lightweight and non-porous plastic. Reliably insulated, double-walled & tightly welded. Self-regulating PTC heating (fixed +86 °C, max. +95 °C). Without heating dishwasher safe up to +90 °C.

Capacity max.* for size 50: 11, 7L | 100: 26L

THE PLUS IN TRANSPORT SAFETY

due to the self-regulating PTC heating, even over longer periods of time

Toploader heated + hygienic stainless steel inner muffle - Size: 100 - orange | black

For transporting & actively keeping food warm in GN-system, as well as for direct scooping via removable cover. Sturdy, lightweight and non-porous plastic. Reliably insulated, double-walled & tightly welded. Heatable full-surface foil heating (max. ± 100 °C). Without heater dishwasher safe up to ± 90 °C.

Capacity max.* for size 100: 26L

• THE PLUS IN HYGIENE THANKS TO THE STAINLESS STEEL INNER MUFFLE efficiently heatable both wet & dry

Toploader neutral + hybrid function - Size: 100 - Color: orange | black

Flexible isostep for separating hot/cold, for space efficient stacking of food in GN-system in different sizes/depths. For transporting & passively keeping food hot/cold. Sturdy, lightweight and non-porous plastic. Reliably insulated, double-walled & seal-welded. Dishwasher safe up to $100\,^{\circ}\text{C}$

Max. capacity* for size 100: 26L

THE PLUS IN LOADING FLEXIBILITY VIA INDENTATIONS ON THE INNER WALL for effortless gripping of stacked GN-containers of any size/depth & hot/cold area can be separated safely and insulated via Isosteg

Frontloader neutral - Sizes: 230 | 500 | 600 | 1000 | 6000 - Color: orange | black

For transporting & passive hot/cold holding of food in the GN system, for sliding onto the seamless deep-drawn support beads. Sturdy, lightweight and non-porous plastic. Reliably insulated, double-walled & tightly welded. Dishwasher safe up to $+90\,^{\circ}\text{C}$.

Max. capacity* for size 230: 26L | 500: 26L | 600: 33L | 1000: 52L | 6000: 104L

• RELIABLE PASSIVE KEEPING WARM & COLD OVER A LONGER PERIOD OF TIME by insertion of suitable GN-pellets

thermoport® PLASTIC VARIANTS



Frontloader digital convection heated (810 W) - Size: 1000 - Color: orange | black

For transporting & active keeping warm of food in GN system, for sliding on the seamless deep-drawn support beads. Sturdy, lightweight and non-porous plastic. Reliably insulated, double-walled & tightly welded. Precise to the degree & digital convection heating, individually adjustable from 20 °C to max. +85 °C. Without heating dishwasher safe up to +90 °C.

Capacity max.* for size 1000: 52L

THE PLUS IN ROBUSTNESS

the circulating air heating is safely protected in the raised housing edge



Frontloader FLAT analog convection heated (550 W) - Sizes: 600 | 6000 - Color: orange | black

For transporting & active keeping warm of food in GN-system, for sliding on the seamless deep-drawn support beads. Sturdy, lightweight and non-porous plastic. Reliably insulated, double-walled & tightly welded. Flush & analog convection heating, up to max. +85 °C. Without heating, dishwasher safe up to +90 °C.

Capacity max.* for size 600: 33L | 6000: 104L



Frontloader FLAT digital convection heated (760 W) - Sizes: 600 | 1000 | 6000 - orange | black

For transporting & active keeping warm of food in GN-system, for sliding on the seamless deep-drawn support beads. Sturdy, lightweight and non-porous plastic. Reliably insulated, double-walled & tightly welded. Flush-mounted degree-accurate & digital convection heating, up to max. +85 °C. Without heating dishwasher safe up to +90 °C.

Capacity max.* for size 600: 33L | 1000: 52L | 6000: 104L

THE PLUS IN SPEED

with 760W a whole 5 minutes faster to 85 °C than the FLAT version with 550W



Pizzaport front loader neutral - color: orange

For transporting & passively keeping warm max. $3x\ 2$ pizza boxes ($320\ x\ 320\ mm$) or 6x pasta with seamless deep-drawn support beads. Sturdy, lightweight and non-porous plastic. Reliably insulated, double-walled & seal-welded. Dishwasher safe up to +90 °C.

Capacity max.*: 70L

• WITH 2 BEAD PAIRS FOR 2X CNS GRATES (INCL.)

per grate fit 3 pizza boxes (320x320) in the pizza port, a total of 6 pizza boxes



Frontloader convection cooled - Size: 1000 - color: orange

For transporting & active cooling (with refrigerant R134a) of food in GN-system, for sliding on the seamless deep-drawn support beads. Sturdy, lightweight and non-porous plastic. Reliably insulated, double-walled & tightly welded. Continuously adjustable silent cooling (cooling range +5 to +8 $^{\circ}$ C), mounted on rear side and flexibly removable. Without cooling element dishwasher safe up to +90 $^{\circ}$ C.

Capacity max.* for size 1000: 52L

COOLING ELEMENT EASILY REMOVABLE

for perfect hygiene of the thermoport®





All prices in Euro without VAT. for settlement with the specialized trade. Our general delivery and order conditions apply. Subject to technical and price changes. Valid from 01.04.2022.

thermoport® plastic **Toploader portable** - unheated / passively cooled

with GN 1/1 plastic cooling plate integrated in the cover.

Unheated food transport box with cover, made of sturdy, lightweight & nonporous plastic. Hygienic double-walled & tightly welded, dishwasher safe (up to +90°C). For stacking GN-containers/thermoplates® with watertight plug-in cover, for reliable & insulated food transport. All thermoport® models, plastic & stainless steel can be stacked in combination. Passively cooled version





thermoport® K 50 unheated

Capacity max. 11.7 L | Ambient temperature: -20°C to +100°C | Loading example: 1 x GN 1/1, 100 mm deep or its subdivision




Dimension	Function	Color	Order no.
mm			
645 x 370 x 240	neutral	orange	85020201
645 x 370 x 240	neutral	schwarz	85020216
645 x 370 x 266	gekühlt	orange	85020214
645 x 370 x 266	gekühlt	schwarz	85020215

thermoport® K 100 unheated

Capacity max. 26 L | Ambient temperature: -20°C to +100°C | Loading example: 1 x GN 1/1, 200 mm deep or its subdivisions



Dimension	Function	Color	Order no.
mm			
645 x 370 x 308	neutral	orange	85020301
645 x 370 x 308	neutral	schwarz	85020328
645 x 370 x 334	gekühlt	orange	85020346
645 x 370 x 334	aekühlt	schwarz	85020347

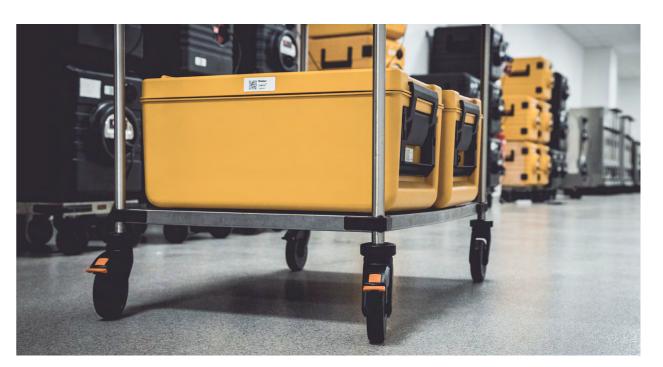

All prices in Euro without VAT. for settlement with the specialized trade. Our general delivery and order conditions apply. Subject to technical and price changes. Valid from 01.04.2022.

thermoport® plastic **Toploader portable**

- unheated with hybrid function

Unheated food transport box with cover & passive cold/warm area separable by isostep. Made of sturdy, lightweight & non-porous plastic. Hygienic double-walled & tightly welded. For space-efficient stacking of GN-containers/ thermoplates® with watertight plug-in cover. All thermoport® models can be stacked in combination with each other.







thermoport® K 100 hybrid passive

Ambient temperature: -20°C to +100°C | Loading example: 1 x GN 1/1, 200 mm deep or its subdivision | Dishwasher-safe up to +90 °C

Dimension	Capacity	Weight	Color	Order no.
mm	max. L	kg		
700 x 425 x	26	7,3	orange	85020353
368	26	7,3	schwarz	85020354
700 x 425 x				
368				



All prices in Euro without VAT. for settlement with the specialized trade. Our general delivery and order conditions apply. Subject to technical and price changes. Valid from 01.04.2022.

thermoport® plastic Toploader portable - heated

Heated food transport box with cover & self-regulating PTC heater fixed permanently to +86°C max. +95°C, wet & dry heated, hygienic double-walled & tightly welded. For stacking GN containers/thermoplates® with waterproof Plug-in cover, for reliable & insulated food transport. All thermoport® models can be stacked together with each other. Nominal voltage 1N AC 230V 50/60Hz.



thermoport® K 50 heated

Connected load: 240 W | Plug type: Schuko plug (type F) | Cable type: smooth cable Cable length: 2,000 mm | Protection class: IPX4 | Suitable for water jets (when heating element is removed) | Ambient temperature: -20°C to +100°C



Dimension	Capacity	Weight	Color	Order no.
mm	max. L	kg		
645 x 370 x	12	7,5	orange	85020206
240	12	7,5	schwarz	85020217
645 x 370 x				
240				

thermoport® K 100 heated

Connected load: 240 W | Plug type: Schuko plug (type F) | Cable type: smooth cable Cable length: 2,000 mm | Protection class: IPX4 | Suitable for water jets (when heating element is removed) | Ambient temperature: -20°C to +100°C



Dimension	Capacity	Weight	Color	Order no.
mm	max. L	kg		
645 x 370 x	26	8,3	orange	85020313
308	26	8,3	schwarz	85020329
645 x 370 x				
308				

thermoport® K 100 heated + CNS

Heated top-loading transport box made of plastic with stainless steel inner muffle & heatable full-surface foil heating (max. +100 °C), wet & dry heatable, double-walled and tightly welded - for the safe transport of food in GN-containers (capacity with GN: max. 26 L). | connected load: 500 W | plug type: Schuko plug (type F) | cable type: smooth cable | cable length: 2,000 mm | protection class: IPX4 | with damp cloth | ambient temperature: -20°C to +100°C



Dimension	Capacity	Weight	Color	Order no.
mm	max. L	kg		
645 x 370 x	26	8,7	orange	85020352
308				

thermoport® plastic Frontloader portable – unheated



Unheated food transport box with door, made of sturdy, lightweight & non-porous plastic. Hygienic double-walled & tightly welded. For insertion of GN -containers/thermoplates® with watertight plug-in cover, for reliable & insulated food transport. All thermoport® models, plastic & stainless steel are stackable in combination.



More info

thermoport® K Pizzaport unheated

support distance: 83 mm | ambient temperature: -20°C to +100°C | loading max. 3 x 2 pizza boxes 320 x 320 mm or 6 pastas



Dimen- sion	Capacity	Weight	Support beads	Color	Order no.
mm	max. L	kg			
397 x 394	-	4,5	2	orange	85020509
x 340					

thermoport® K 600 unheated

Support distance: 36 mm | Ambient temperature: -20°C to +100°C | Suitable for dishwashers



Dimen- sion	Capacity	Weight	Support beads	Color	Order no.
mm	max. L	kg			
610 x 435	33	8,2	7	orange	85020505
x 385	33	8,2	7	schwarz	85020518
610 x 435					
x 385					

thermoport® K 1000 unheated

Support distance: 36 mm | Ambient temperature: -20 $^{\circ}$ C to +100 $^{\circ}$ C | Suitable for dishwashers up to +90 $^{\circ}$ C



Dimen- sion	Capacity	Weight	Support beads	Color	Order no.
mm	max. L	kg			
610 x 435	52	12,0	12	orange	85020401
x 561	52	12,0	12	schwarz	85020412
610 x 435					
x 561					

thermoport® K 6000 unheated

Support distance: 36 mm | Ambient temperature: -20°C to +100°C | Suitable for dishwashers up to +90 °C



Dimen- sion	Capacity	Weight	Support beads	Color	Order no.
mm	max. L	kg			
779 x 644	104	20,5	12	orange	85020801
x 562	104	20,5	12	schwarz	85020805
779 x 644					
x 562					

		1	
	Charles Control	Pilejo	8,
F.		1	
			9

thermoport® plastic Frontloader portable - convection heated

Circulating air heated food transport box with door, digital temperature setting accurate to the degree from +20°C to + 85°C. Hygienic double-walled & tightly welded, dishwasher-safe without heating (up to +90°C). For insertion of GN-containers/thermoplates® with watertight plug-in cover. All thermoport® Kunstst. & stainless steel can be stacked in combination. Rated voltage 1N AC 230V 50/60Hz.





thermoport® K 600 D-FLAT-convection heated

Heating control: digital | Connected load: 500 W | Plug type: Schuko plug (type F) Cable type: smooth cable | Cable length: 2,000 mm | Protection class: IPX4 Support distance: 36 mm | Ambient temperature: -20°C to +100°C

Dimen- sion	Capacity	Weight	Support beads	Color	Order no.
mm	max. L	kg			
435 x 639	33	10,7	7	orange	85020526
x 385	33	10,7	7	schwarz	85020527
420 x 645					
x 390					



thermoport® K 600 A-FLAT-convection heated

Heating control: analog | Connected load: 500 W | Plug type: Schuko plug (type F) Cable type: smooth cable | Cable length: 2,000 mm | Protection class: IPX4 Support distance: 36 mm | Ambient temperature: -20°C to +100°C

Dimen- sion	Capacity	Weight	Support beads	Color	Order no.
mm	max. L	kg			
435 x 639	33	10,7	7	orange	85020524
x 385	33	10,7	7	schwarz	85020525
420 x 645					
x 390					



thermoport® K 1000 convection heated

Heating control: digital | Connected load: 810 W | Plug type: Schuko plug (type F) Cable type: smooth cable | Cable length: 2,000 mm | Protection class: IPX4 Support distance: 36 mm | Ambient temperature: -20°C to +100°C

Dimen- sion	Capacity	Weight	Support beads	Color	Order no.
mm	max. L	kg			
688 x 435	52	17,6	12	orange	85020423
x 561	52	17,6	12	schwarz	85020424
688 x 435					
x 561					



Heating control: digital | Connected load: 500 W | Plug type: Schuko plug (type F) Cable type: smooth cable | Cable length: 2,000 mm | Protection class: IPX5 Support distance: 36 mm | Ambient temperature: -20°C to +100°C



Dimen- sion	Capacity	Weight	Support beads	Color	Order no.
mm	max. L	kg			
435 x 634	52	14,8	12	orange	85020436
x 561	52	14,8	12	schwarz	85020437
435 x 634					
x 561					

thermoport® K 1000 A-FLAT-convection heated

Heating control: analog | Connected load: 500 W | Plug type: Schuko plug (type F) Cable type: smooth cable | Cable length: 2,000 mm | Protection class: IPX4 Support distance: 36 mm | Ambient temperature: -20°C to +100°C



Dimen- sion	Capacity	Weight	Support beads	Color	Order no.
mm	max. L	kg			
435 x 634	52	14,8	12	orange	85020434
x 561	52	14,8	12	schwarz	85020435
435 x 634					
x 561					

thermoport® K 6000 D-FLAT-convection heated

Heating control: digital | Connected load: 500 W | Plug type: Schuko plug (type F) Cable type: smooth cable | Cable length: 2,000 mm | Protection class: IPX4 Support distance: 36 mm | Ambient temperature: -20°C to +100°C



Dimen- sion	Capacity	Weight	Support beads	Color	Order no.
mm	max. L	kg			
644 x 779	104	23,0	12	orange	85020815
x 562	104	23,0	12	schwarz	85020816
644 x 779					
x 562					

thermoport® K 6000 A-FLAT-convection heated

Heating control: analog | Connected load: 500 W | Plug type: Schuko plug (type F) Cable type: smooth cable | Cable length: 2,000 mm | Protection class: IPX4 Support distance: 36 mm | Ambient temperature: -20°C to +100°C



Dimen- sion	Capacity	Weight	Support beads	Color	Order no.
mm	max. L	kg			
644 x 779	104	23,0	12	orange	85020813
x 562	104	23,0	12	schwarz	85020814
644 x 779					
x 562					

thermoport® plastic Frontloader portable - cooled

Refrigerated food transport box with door, infinitely variable silent cooling +5°C to +8°C, removable, refrigerant R134a. Hygienic double walled & seal welded, dishwasher safe without refrigeration up to +90°C. Thermoport® plastic & stainless steel can be stacked together in combination. Dismantled cooling only store upright! Rated voltage 1N AC 230V 50/60Hz.





Connected load: 72 W | Plug type: Schuko plug (type F) | Cable type: smooth cable Protection class: IPX5 | Suitable for water jets (when heating element is removed) Ambient temperature: -20°C to +100°C

Dimen- sion	Capacity	Weight	Support beads	Color	Order no.
mm	max. L	kg			
760 x 435	52	19,6	12	orange	85020440
x 561					



All prices in Euro without VAT. for settlement with the specialized trade. Our general delivery and order conditions apply. Subject to technical and price changes. Valid from 01.04.2022.

GN-Bench-Trolley plastic heated and/or unheated - analog/digital

2x banquet transport box, firmly connected on mounted rollers, in the combinations heated max. +90°C and/or unheated, with analog or digital controllable circulating air heating from +20°C to max.+85°C. With seamless deepdrawn support ledges for GN-grates/containers. Double-walled & tightly welded. For safe transport, ready-to-serve keeping warm & simultaneous serving. Rated voltage 1N AC 230V 50/60Hz.



thermoport® K 2x6000 D-FLAT unheated & heated

Heating control: digital | Connected load: 500 W | Cable length: 2,000 mm | 2 swivel castors; 2 swivel stop castors | Castor Ø: 125 mm

Dimen- sion	Weight	Support beads	Support distance	Color	Order no.
mm	kg				
766 x 790	55,0	2 x 12	36 mm	orange	85020825
x 1280	55,0	2 x 12	36 mm	schwarz	85020826
766 x 790					
x 1280					



thermoport® K 2x6000 A-FLAT unheated & heated

Heating control: analog | connected load: 500 W | cable length: 2,000 mm | 2 swivel castors; 2 swivel stop castors | Castor Ø: 125 mm

Dimen- sion	Weight	Support beads	Support distance	Color	Order no.
mm	kg				
766 x 790	55,0	2 x 12	36 mm	orange	85020823
x 1280	58,0	2 x 12	36 mm	schwarz	85020824
766 x 790					
x 1280					



thermoport® K 2x6000 unheated

2 swivel castors; 2 swivel stop castors | Castor Ø: 125 mm

Dimen- sion	Weight	Support beads	Support distance	Color	Order no.
mm	kg				
766 x 779	53,0	2 x 12	36 mm	orange	85020802
x 1280	53,0	2 x 12	36 mm	schwarz	85020812
766 x 779					
x 1280					



thermoport® plastic Accessories

Matching accessories for all thermoport® plastic models – such as slide-in frames for various smaller GN-container sizes, synthetic GN-cooling or heating pellets for passive cold / warm holding, through to the chassis and rolliport for non-slip transport of all thermoport® models.



Mara inf

T

Chassis - thermoport® plastic

Weight	Order no.
kg	
5,2	88140106



Rolliport plastic – thermoport® K

Suitable for thermoport: 50 / 100 / 105L / 600 / 1000 | 2 fixed; 1 swivel; 1 swivel stop castors Castor Ø: $125 \, \text{mm} | 4$ shock corners

Weight	Order no.
kg	
8,6	88070601



Mounting chassis – thermoport®K 1000

Weight	Order no.
kg	
6.3	88140105

Rolli – thermoport® K 6000

Weight	Order no.
kg	
11,3	88140201



Subject to technical and price changes. Valid from 01.04.2022.

Stacking lock – thermoport® K 1000

Weight	Order no.
kg	
1,0	85022061

Iso room divider plastic - orange

All prices in Euro without VAT. for settlement with the specialized trade. Our general delivery and order conditions apply.

Weight	Order no.
kg	
1,1	85022012

Iso room divider 1/1 – TH K 1000 – black

Weight	Order no.
kg	
1,1	85022069

Iso bar – thermoport® K 100

Weight	Order no.
kg	
1,6	85022042

Slide-in frame - 1/4, 1/6, 2/4

Weight	Order no.
kg	
0,5	85012009

Slide-in frame - 1/6, 1/9

Weight	Order no.
kg	
0,7	85012010

GN-Crossbar – thermoport® 50K/100K

Weight	Order no.
kg	
0,1	84190202



Sealing plug heating TH 50KB/100KB

Weight	Order no.
kg	
0,0	37130841

GN-cooling-pellet plastic 1/1 - orange

Weight	Order no.
kg	
2,6	85022038



GN-cooling-pellet plastic 1/1 – black

Weight	Order no.
kg	
2,7	85022067



Heat pellet-CNS GN 1/2 – asymmetrical




Weight	Order no.
kg	
1,4	89080171

Heat pellet-CNS GN 1/1



Weight	Order no.
kg	
2,9	89080172

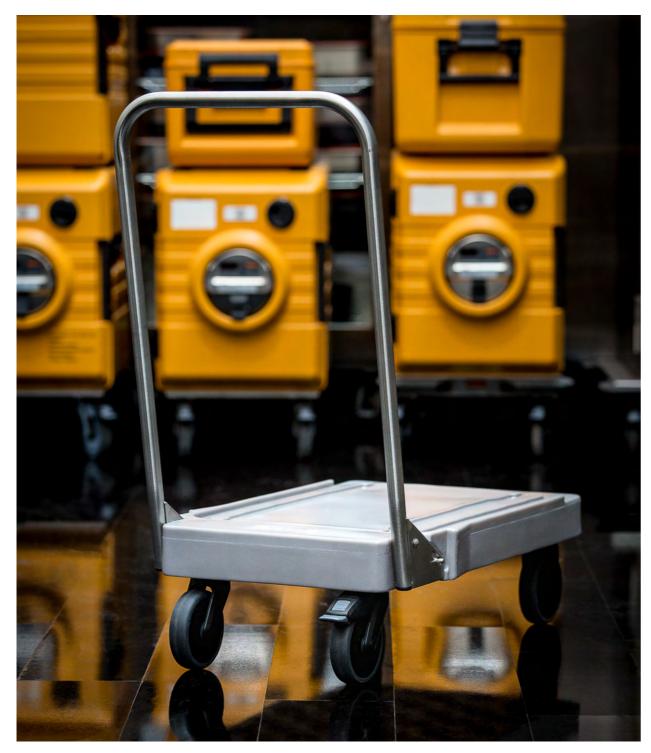

All prices in Euro without VAT. for settlement with the specialized trade. Our general delivery and order conditions apply. Subject to technical and price changes. Valid from 01.04.2022.

Transport-/dispensing trolley for portable plastic & stainless steel thermoport® models

Robust stainless steel trolley, for transporting portable thermoport® plastic/ stainless steel boxes 50, 100, 600 or 1000. On stable shelf with non-slip embossing for 1-3 thermoport® boxes. Can also be used for mobile food serving, by direct scooping from thermoport® top loader models. All-round impact protection, practical additional storage space on the lower shelf.





Transport- /dispensing trolley 3x thermoport®

2 fixed; 1 swivel; 1 swivel stop castors | Castor Ø: 125 mm | 4 shock corners

Dimension	Weight	Max. payload	Order no.
mm	kg		
1775 x 706 x	28,0	210 kg	88150301
840			



Transport- /dispensing trolley 2x thermoport®

2 fixed; 1 swivel; 1 swivel stop castors | Castor Ø: 125 mm | 4 shock corners

Dimension	Weight	Max. payload	Order no.
mm	kg		
1271 x 706 x	22,0	130 kg	88150201
840			

Transport- /dispensing 1x thermoport®

2 fixed; 1 swivel; 1 swivel stop castors | Castor Ø: 125 mm | 4 shock corners

Dimension	Weight	Max. payload	Order no.
mm	kg		
706 x 705 x 840	13,5	80 kg	88150101





All prices in Euro without VAT. for settlement with the specialized trade. Our general delivery and order conditions apply. Subject to technical and price changes. Valid from 01.04.2022.

Beverage container – Thermi plastic - unheated

Beverage container made of impact resistant germ resistant polypropylene, suitable for direct filling, dishwasher safe up to +90°C. Double walled insulated, with/without drip tray (stackable), integrated drain cock with bayonet closure, easy to carry with 2 U-clips & 3 carrying handles. For 10-40 liters of liquid per model, applicable -20°C to +100°C.





Beverage container Thermi K 10L unheated

Dimension	Content	Weight	Order no.
mm	L	kg	
360 x 255 x 390	10,0	3,4	85040210



Beverage container Thermi K 10L – Drip pan unheated

Dimension	Content	Weight	Order no.
mm	L	kg	
360 x 255 x 482	10,0	4,4	85040211



Beverage container Thermi K/CNS 12L unheated

Dimension	Content	Weight	Order no.
mm	L	kg	
240 x 620 x 430	12,0	6,2	85040203

Beverage container Thermi K 20L unheated

Dimension	Content	Weight	Order no.
mm	L	kg	
360 x 255 x 615	20,0	6,0	85040212

Beverage container Thermi K 20L - Drip pan unheated

Dimension	Content	Weight	Order no.
mm	L	kg	
360 x 255 x 720	20,0	6,8	85040213

Beverage container - Thermi stainless steel - unheated

Beverage container made of hygienic stainless steel, double-wall insulated, inner container deep-drawn & seamlessly welded, suitable for direct filling. Exterior with 2 tension locks & 1 carrying handle, silicone seal, vent plug & shock-proof, easy-to-clean drain cock. For transporting 7-24 liters of liquid depending on model.





Beverage container Thermi CNS 7L unheated

Dimension	Content	Weight	Order no.
mm	L	kg	
147 x 426 x 407	7,0	5,0	85040107



Beverage container Thermi CNS 8L unheated

Dimension	Content	Weight	Order no.
mm	L	kg	
219 x 368 x 335	8,0	6,1	85040112



Beverage container – Thermi stainless steel - heated

Beverage container made of hygienic stainless steel, with fixed heater 230V/80W, rear connection cable 2m. Double wall insulated, deep drawn inside & seamlessly welded. Outside 2 tension locks & 1 carrying handle, silicone gasket, vent plug & shockproof easy to clean drain cock. For transporting 7-24 liters of liquid per model.







Beverage container Thermi CNS 8L heated

Connected load: 110 W | Schuko plug (type F) | Cable length: 2,000 mm

Dimension	Content	Weight	Order no.
mm	L	kg	
219 x 368 x 335	8,0	7,2	85040101

Beverage container Thermi CNS 12L heated

Connected load: 110 W | Schuko plug (type F) | Cable length: 2,000 mm

Dimension	Content	Weight	Order no.
mm	L	kg	
219 x 368 x 435	12,0	7,8	85040102



Beverage container Thermi CNS 16L heated

Connected load: 110 W | Schuko plug (type F) | Cable length: 2,000 mm

Dimension	Content	Weight	Order no.
mm	L	kg	
219 x 368 x 535	16,0	10,2	85040103



Beverage container Thermi CNS 24L heated

Connected load: 110 W | Schuko plug (type F) | Cable length: 2,000 mm

Dimension	Content	Weight	Order no.
mm	L	kg	
219 x 368 x 735	24.0	14.6	85040104

Thermi Accessories

Matching accessories for the corresponding Thermi models, such as the base saucers for placing underneath made of hygienic & robust stainless steel for slip- & drip-proof beverage filling from the Thermi drain tap above.



Base - Thermi CNS 7L heated/unheated

Weight	Order no.
kg	
0,8	85040305



Base - Thermi CNS 8L, 12L, 16L, 24L

Weight	Order no.
kg	
2,0	85040304







Your thermoport® for endless variety of enjoyment

Discover our modular assembly variants

Frontloader for up to 50 people




MORE
PLACEMENT
VARIETY

* Personal data are approxima may vary depending on use.

Your thermoport® for endless variety of enjoyment

thermoport® 1000


polypropylene & stainless steel 🛆





thermoport® 1000


polypropylene & stainless steel 🖒






thermoport® 1000

polypropylene & stainless steel 🛆






FRONTLOADER

up to 50 people

thermoport® 1000


polypropylene & stainless steel 🖒





thermoport® 1000


polypropylene & stainless steel &





thermoport® 1000

polypropylene & stainless steel 🛆






Your thermoport® for endless variety of enjoyment

thermoport® 1000


polypropylene & stainless steel 🛆





thermoport® 1000


polypropylene & stainless steel **



1x cooling pellet
2x 1/1 065f
1x 1/3 065f
1x 2/3 065f
4,3l dessert

thermoport® 1000

polypropylene & stainless steel 🖒






FRONTLOADER

up to 50 people

thermoport® 1000


polypropylene & stainless steel 🖒






thermoport® 1000


polypropylene & stainless steel 🖒





thermoport® 1000

polypropylene & stainless steel 🛆







Your thermoport® for endless variety of enjoyment


thermoport® 1000

polypropylene & stainless steel 🖒






thermoport® 1000 polypropylene & stainless steel 🖒






thermoport® 1000

polypropylene & stainless steel 🛆






FRONTLOADER

up to 50 people







thermoport® 1000 👌

stainless steel





MORE RIEBER PLACEMENT VARIETY





Your thermoport® for endless variety of enjoyment

Discover our modular assembly variants

Frontloader for more than 50 people



MORE
PLACEMENT
VARIETY

* Personal data are approximate, may vary depending on use.

PLACEMENT OPTIONS FROM 50 PEOPLE

Your thermoport® for endless variety of enjoyment

thermoport® 1000

polypropylene & stainless steel 🛆




people components

52
2

1x 1/1 200f
3x 1/1 065f
26l pasta
each 7l various sauces

thermoport® 1000


polypropylene & stainless steel 🛆





thermoport® 1000

polypropylene & stainless steel 🛆





FRONTLOADER

from 50 persons

thermoport® 1000

polypropylene & stainless steel 🖒





thermoport® 1400 🖒

stainless steel






thermoport® 2000 🖒

stainless steel






PLACEMENT OPTIONS FROM 50 PEOPLE

Your thermoport® for endless variety of enjoyment

thermoport® 1600 🖒 stainless steel




thermoport® 1000 polypropylene & stainless steel *



thermoport® 1600 ^(^) stainless steel










FRONTLOADER

from 50 persons


thermoport® 1600 🖰

stainless steel



thermoport® 1000

polypropylene & stainless steel 🕸




thermoport® 1300 🖰

stainless steel









PLACEMENT OPTIONS FROM 50 PEOPLE

Your thermoport® for endless variety of enjoyment

thermoport® 1000


polypropylene & stainless steel **





thermoport® 1000


polypropylene & stainless steel **






thermoport® 1000

polypropylene & stainless steel **





FRONTLOADER

from 50 persons

thermoport® 3000 🖒

stainless steel






thermoport® 2000 🖒

stainless steel





thermoport® 1000

polypropylene & stainless steel *







Your thermoport® for endless variety of enjoyment

Discover our modular assembly variants

Toploader for up to 50 people



MORE
PLACEMENT
VARIETY

* Personal data are approximate, may vary depending on use.

Your thermoport® for endless variety of enjoyment

thermoport® 100

polypropylene & stainless steel 🛆



1 0 3

1 1 0 3

1 1 1 3 65
1 1 1 3 200
1 2 1 meat
1 1 1 3 200
1 1 1 sauce
3 1 1 3 watertight lid

thermoport® 100 polypropylene & stainless steel 🖒




2x 1/2 100
thermoplates
2x 1/2 watertight lid

thermoport® 100

polypropylene & stainless steel 🖒





TOPLOADER

up to 50 people

thermoport® 100

polypropylene & stainless steel 🖒






thermoport® 100

polypropylene & stainless steel 🖒






thermoport® 100

polypropylene & stainless steel 🖒






Your thermoport® for endless variety of enjoyment

thermoport® 100

polypropylene & stainless steel 🖒






thermoport® 100

polypropylene & stainless steel 🛆






thermoport® 100

polypropylene & stainless steel 🖒





TOPLOADER


up to 50 people

thermoport® 100

polypropylene & stainless steel 🖒







MORE RIEBER PLACEMENT VARIETY



CHECK CLOUD

100 % food safety

– at the same time less effort for you.

Personal



Security

SAY GOODBYE TO HACCP PAPER CHAOS

No more confusing or lost HACCP paperwork! CHECK CLOUD provides easy to use record keeping, digitally accessible at any time. All measuring points and documentation as well as alarms centrally in a web interface. Organize your operation from anywhere and always be informed about all your process-relevant data.

Efficient energy management

- is your refrigerator constantly 3 °C too cold?

Ask for CHECK HACCP and additionally uncover your savings potentials.



learn mor

CHECK Cockpit

Central web-based data retrieval, configuration and management (temperature HACCP report, hygiene report, quality index, user and rights management, export, system configuration, setting task intervals).

Mobile CHECK

Manual temperature measurement via Bluetoothcapable core temperature sensor and CHECK app. Simple hygiene and service management with flexible, individually compilable checklists and additional photo and text function via the CHECK app. **Order no. 94 01 01 05**










Mobile CHECK


Universal can also be used individually outside HACCP for a wide variety of control areas (maintenance, facility management, cleaning, production, plant maintenance).

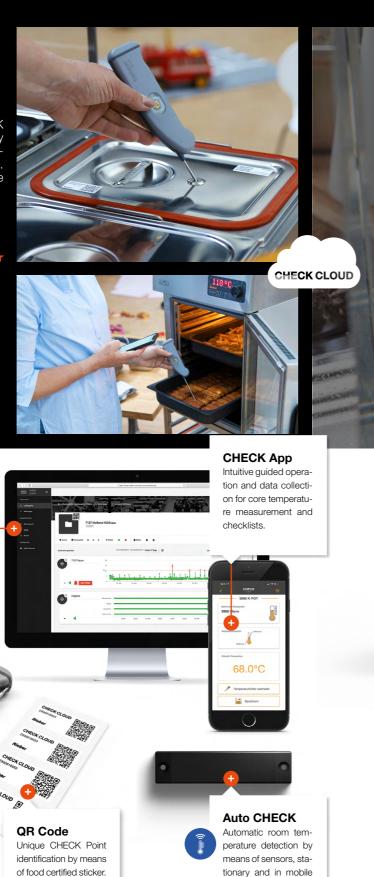

devices.

Order no. 94 02 01 38

Quality Time WITH CHECK ALL YOUR TEMPERATURES IN VIEW AT ALL TIMES Energy Paper **Acquisition costs Archiving** with internal sensor (see picture) Order No. 94 02 01 48 with external sensor (with cable) Order No. 94 02 01 49 Retrofittable measuring sensor Order No. 94 02 01 50 30 Messunger Tiefkühlhaus



OUR AWARDS

RIEBER CONNECT

100 % SAFE TO OPERATE & COOK - EVEN WITHOUT **SPECIALIST STAFF**

In addition to digital safety, hygiene and organization of meals via the CHECK CLOUD platform, Rieber connects its core products with its own app & cockpit.

Starting with storage - here the classic communal refrigerator becomes the digital sharing refrigerator multipolar® CONNECT, which can be opened via app completely wit-

During preparation and serving, the K|POT® CONNECT can be used to flexibly create and call up individual programs, perfectly matched to the food. Thus, the regeneration of a wide variety of dishes, including cook & freeze dishes, is possible in a process-safe, easily controllable, digital and automatic manner. Other transport and preparation products such as hybrid kitchen or Regiostation are also connected and can thus be flexibly controlled digitally.







multipolar®

& allergy food – safe separate cooling







The perfect CONNECT combination, the multipolar® & K|POT® CONNECT, Get meal as a sharing solution. Efficient cooling with individual compartments and 2. Step: Food in GN-thermoplates® can be and target time with the appremoved directly and heated or regenerated on the KIPOT® CONNECT 3. Step: the K|POT® CONNECT via the app.

Get meal with app from multipolar® CONNECT

regeneration that is sure to succeed. Set thermoplates® to KIPOT® CONNECT, set the recipe

via the app. heated or regenerated on Enjoy regenerated à la minute at the desired time!





For food quality to the point with an absolute guarantee of success.

Easy operation via the app, set recipe and target time. Via the cockpit you can create your own programs tailored to your dishes & meals.

Can also be used to create your own regeneration programmes suitable for Cook & Chill or Cook & Freeze.





DIGITAL SERVICE

RIEBER 24/7 SERVICE – SIMPLE & AT ANY TIME

With the standard QR code on our products, you can easily and quickly access all relevant service information about the product.

In addition, the product can be connected with this QR code via directly with the CHECK CLOUD via the CHECK App all in one, digital service & security on demand security on demand

On the Video Channel you will find specific service videos on operation, associated spare parts & correct cleaning for each model variant. Available at any time via the QR code on the product simply explained and with German and English subtitles. Simply scan the QR code and find out all service information via tutorial videos at a glance.










Service Information



- + Safety & warning instructions
- + Spare parts replacement & accessories application
- + Cleaning recommendation & tips
- + Maintenance & malfunction information
- + General service information









RIEBER NEWSLETTER



KEEP UP TO DATE

WITH OUR INNOVATIONS, SUSTAINABILITY BECOMÉS PROFITABLE.

We help you reduce your CO, emissions while efficiently increasing your quality & bottom line.

- Energy-saving multi-layer material SWISS|PLY
- Traceable & digital reusable organization eatTAINABLE
 Paperless HACCP food safety & checklists in CHECK CLOUD system

REGISTER HERE

Rieber

Rieber

Please contact us at:

Germany

Rieber GmbH & Co. KG

Hoffmannstraße 44 D-72770 Reutlingen

+49 (0) 7121 518-0 export@rieber.de

United Kingdom

BGL Rieber Ltd

Unit 1, Lincoln Industrial Estate Avro Business Centre, Avro Way Bowerhill. Melksham SN12 6TP. United Kingdom

+44 (0) 1225-704470 sales@bglrieber.co.uk

www.bglrieber.co.uk

Find us on:



















